


Double fork positioner for 2-4 pallets

DPK-C
DPK-P

The double fork positioner **DPK-C** can pick up two or four pallets through hydraulic fork positioning and extra fork length. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility. With the extended forks it is possible to load and unload vehicles from one side. Sideshift is fitted as standard.

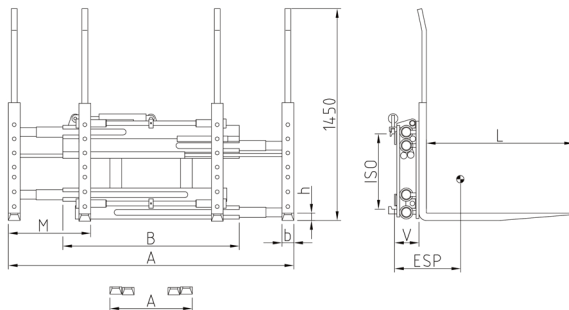

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	M mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DPK 34-C	1600/1200	3,5-4,0/500	III	1200	560-1940	560	80x60x2400	+/- 100	185	620	815
DPK 45-C	2500/1200	4,0/600-5,0/500	III	1400	560-1940		80x65x2400	+/- 150	195	520	970
DPK 48-C	2800/1200	5,0/600	III	1400	560-1940		80x65x2400	+/- 150	195	505	995
DPK 60-P	3600/1200	5,0-6,0/600	IV	1420	560-1940		80x65x2400	+/- 150	171	490	1095
DPK 80-P	4600/1200	7,0-8,0/600	IV	1420	560-1940		80x70x2400 100x65x2400	+/- 150	171	485	1190
DPK 100-P	5600/1200	8,0/900	IV	1800	580-1960		90x70x2400 105x65x2400	+/- 150	181	483	1425
DPK 120-P	7000/1200	8,0/900	IV	2000	580-1960		90x70x2400 105x65x2400	+/- 150	181	477	1480
DPK 180-C1-*	9600/1200	15,0/600	integrated	2550	750-2080		160x70x2400	+/- 200	390	415	3800

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- no sideshift ISO II, III, ISO IV upon request, data change, please ask
- optional with high visibility load backrest ISO II, III upon request, ISO IV not available



automatic lubrication system:

DPK 34-C - DPK 55-C upon request (sideshift top)

DPK 60-CP - DPK 120-CP upon request

- single pair control upon request
- scanner holder upon request

* weight without brackets / COG is without brackets, from front edge of brackets / LLC is from front edge of brackets

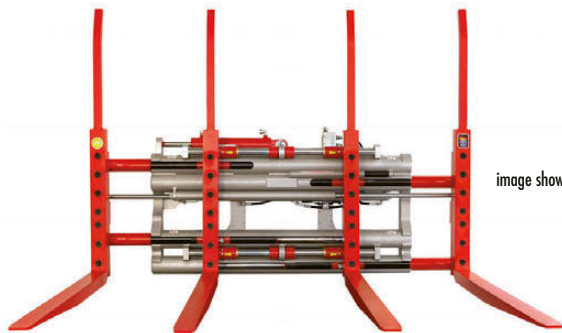


image shows DPK 45 C

DURWEN
Forklift Attachments

More than 75 years experience