


# Triple fork positioner for 1-2-3 pallets

The triple fork positioner DRPK-C can pick up one, two or three pallets through hydraulic fork positioning. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. Sideshift is fitted as standard.

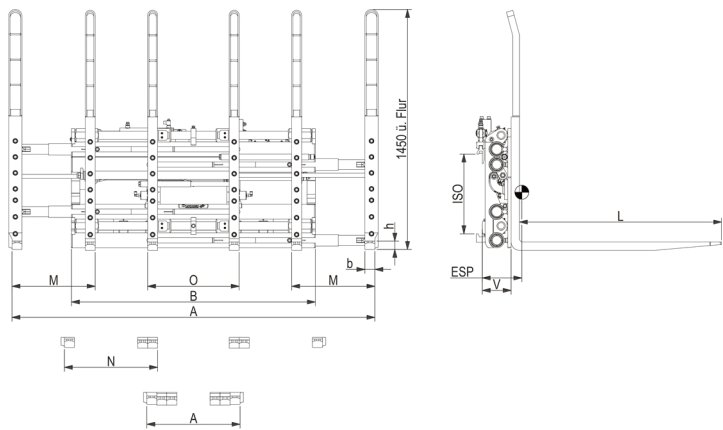

| type      | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm | opening range<br>A<br>AK-AK mm | M/N/O<br>mm | forks<br>b x h x L<br>mm | sideshift<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|-----------|-------------------------|---------------------------|-----|---------|--------------------------------|-------------|--------------------------|-----------------|----------------|------------------|--------------|
| DRPK 25-C | 2500/600                | 2,5/600                   | II  | 1630    | 560-2285                       | 500/560/550 | 60x50x1200               | +/- 100         | 173            | 230              | 745          |
| DRPK 30-C | 3000/600                | 3,0-3,5/600               | III | 1465    | 560-2240                       | 530/590/550 | 60x50x1200               |                 | 173            | 235              | 730          |
|           |                         |                           |     | 1630    | 560-2285                       | 500/560/550 |                          |                 |                | 235              | 745          |
|           |                         |                           |     | 1795    | 560-2450                       | 500/560/550 |                          |                 |                | 233              | 770          |
| DRPK 45-C | 3800/600                | 4,0-5,0/600               | III | 1630    | 560-2285                       | 500/560/550 | 60x60x1200               |                 | 173            | 240              | 800          |
|           |                         |                           |     | 1795    | 560-2450                       |             |                          |                 |                | 237              | 825          |
|           |                         |                           |     | 2006    | 560-2660                       |             |                          |                 |                | 220              | 880          |
|           |                         |                           |     | 2285    | 560-2940                       |             |                          |                 | 225            | 945              |              |
| DRPK 50-C | 4500/600                | 5,0/600                   | IV  | 1980    | 560-2760                       | 510/570/580 | 60x65x1200               |                 | 233            | 235              | 1220         |

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- no sideshift class II and III, class IV upon request, data change, please ask
- optional with high visibility load backrest ISO II, III upon request, ISO IV not available

-  automatic lubrication system:  
DRPK 25- C - DRPK 50-C upon request
- single pair control upon request
  - scanner holder upon request



image shows DRPK 45 C with option:  
high visibility load backrest