

Newly upgraded version

CLAMPS UP TO 2 TONS















Clamps up to 2 tons


The **clamps** up to a capacity of 2 tons were widely upgraded and optimized resulting in a significant improvement of the technical data. The clamps are able to move beyond the basic frame width of the unit. They are suitable for clamping and/or handling loads on the forks. Depending on application/load, the type may change. There are rotating and non-rotating clamps. Good visibility and a compact design are an important feature. Depending on the attachment type, the unit is equipped with constant or integral sideshift. Without sideshift is also an option.

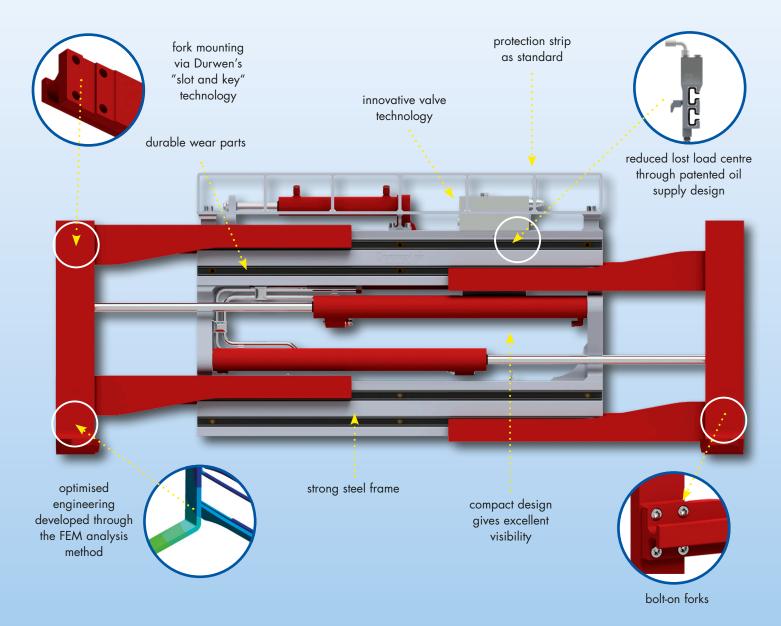

- √ lower lost load centre via patended oil supply
- ✓ reduced weight
- ✓ increased residual capacity
- ✓ standard with bolt-on forks resulting in lower spare part cost
- ✓ design with improved visibility
- ✓ Stable construction due to compact and strong frame
- ✓ slot and key connection
- √ high-quality wear parts
- √ valve technology with regenerative circuit
- ✓ modular design

FEM optimized - lower lost load centre and weight

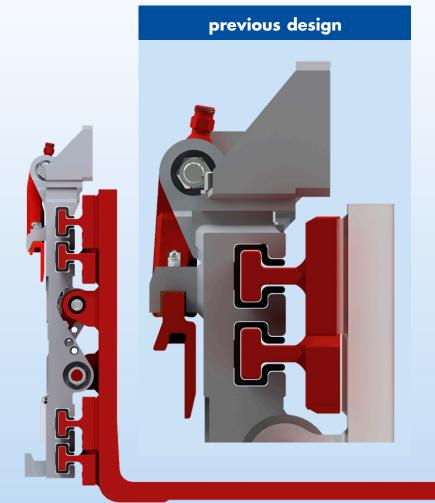

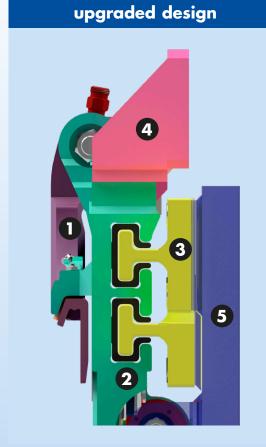

- next gen sideshift for improved weight
- 2 slim frame design/E-profile for lower lost load centre
- 3 optimized T-profile

- 4 protection strip with lower weight
- **5** ideal fork dimension







You are looking for a digital version: export@durwen.de

DURWEN SERVICE - YOUR BACKUP!



Durwen factory I, Plaidt



Durwen research and development centre



Durwen Maschinenbau GmbH August-Horch-Straße 5 56637 Plaidt - Germany

Phone: +49 2632-7000-0 Fax: +49 2632-7000-299

export@durwen.de www.durwen.de





Durwen factory II, Mayen



... well prepared to support you



your partner