


Durwen products for all your needs



DURWEN SUPPORT WORLDWIDE

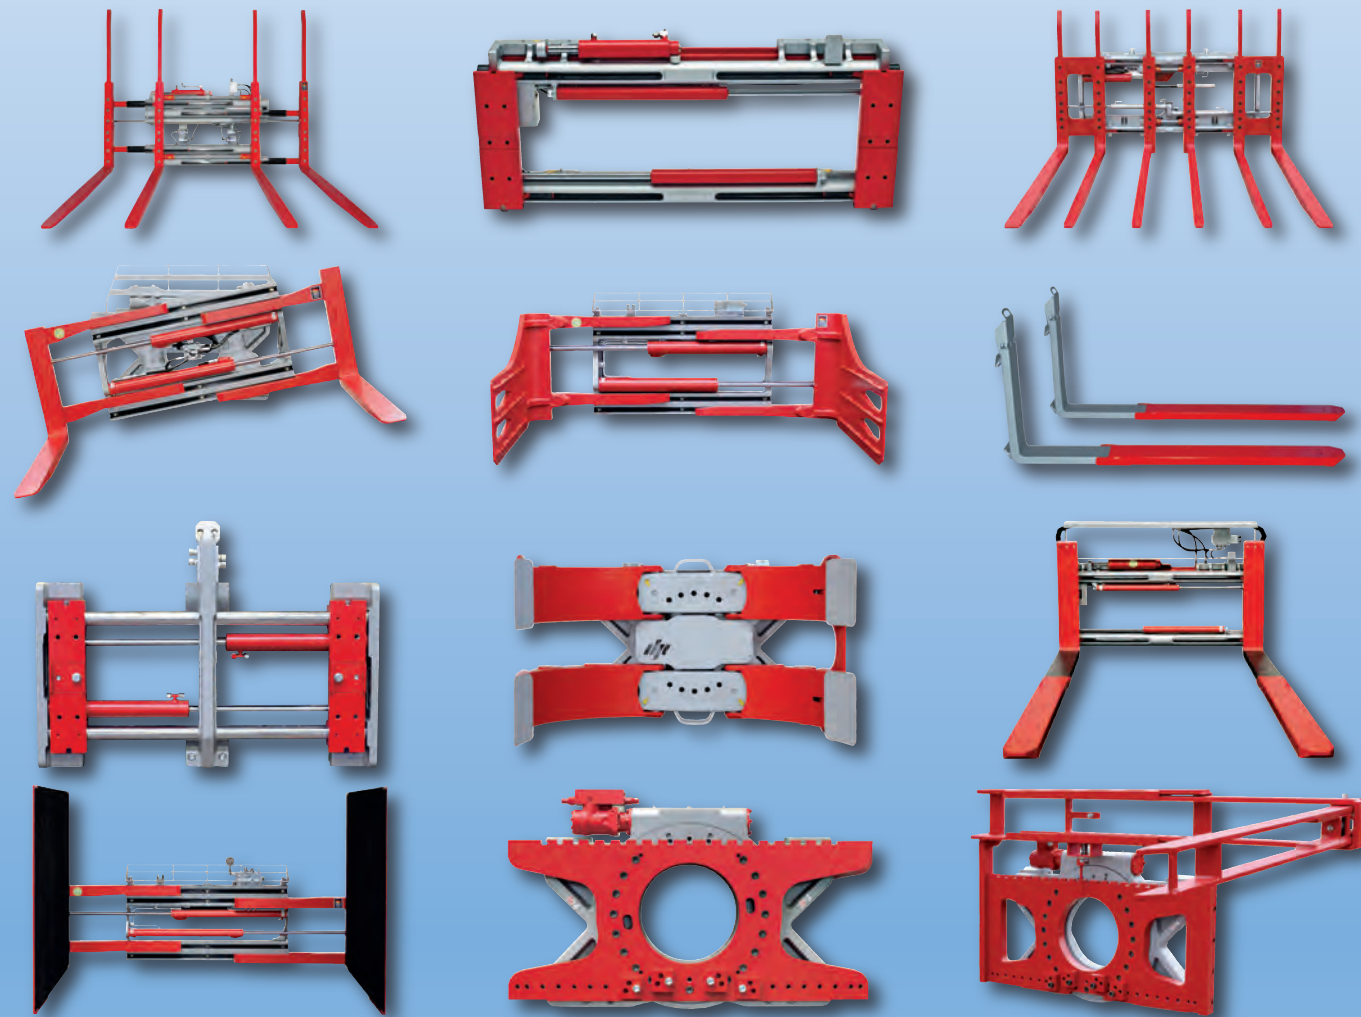

More than 70 years experience


Durwen Maschinenbau GmbH
August-Horch-Straße 5
56637 Plaidt - Germany

Phone: +49 26 32-70 00-0
Fax: +49 26 32-70 00-299

export@durwen.de
www.durwen.de



your partner

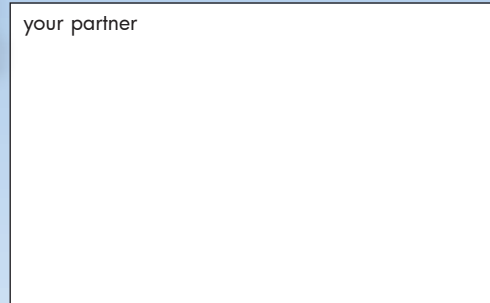

SWV_4S_ENG_05/2020



QUICK-CHANGE SYSTEM SWV


INNOVATIVE – VERSATILE – DURABLE




QUICK-CHANGE SYSTEM

Mechanical locking mechanism


By using the Durwen **quick-change system**, attachments can be interchanged fast, safe and easy. This system is primarily used for forklift trucks to be employed in various applications which need a number of different attachments. As standard, the lower locking mechanism is mechanical. The attachment is hooked onto the front part of the quick-change system. Integral design for your mast as well as for various attachments is available upon request.

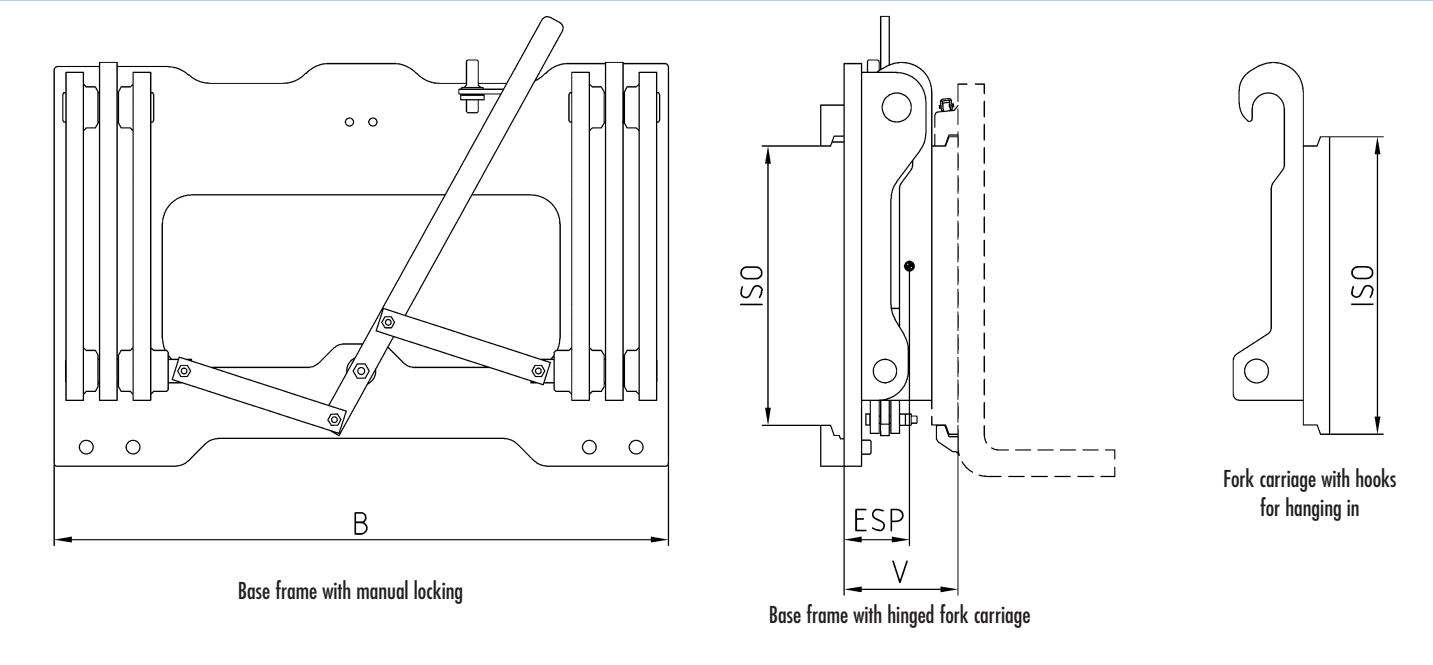

Quick-change system including one carriage with hooks. ISO forks as well as Durwen attachments may be used.

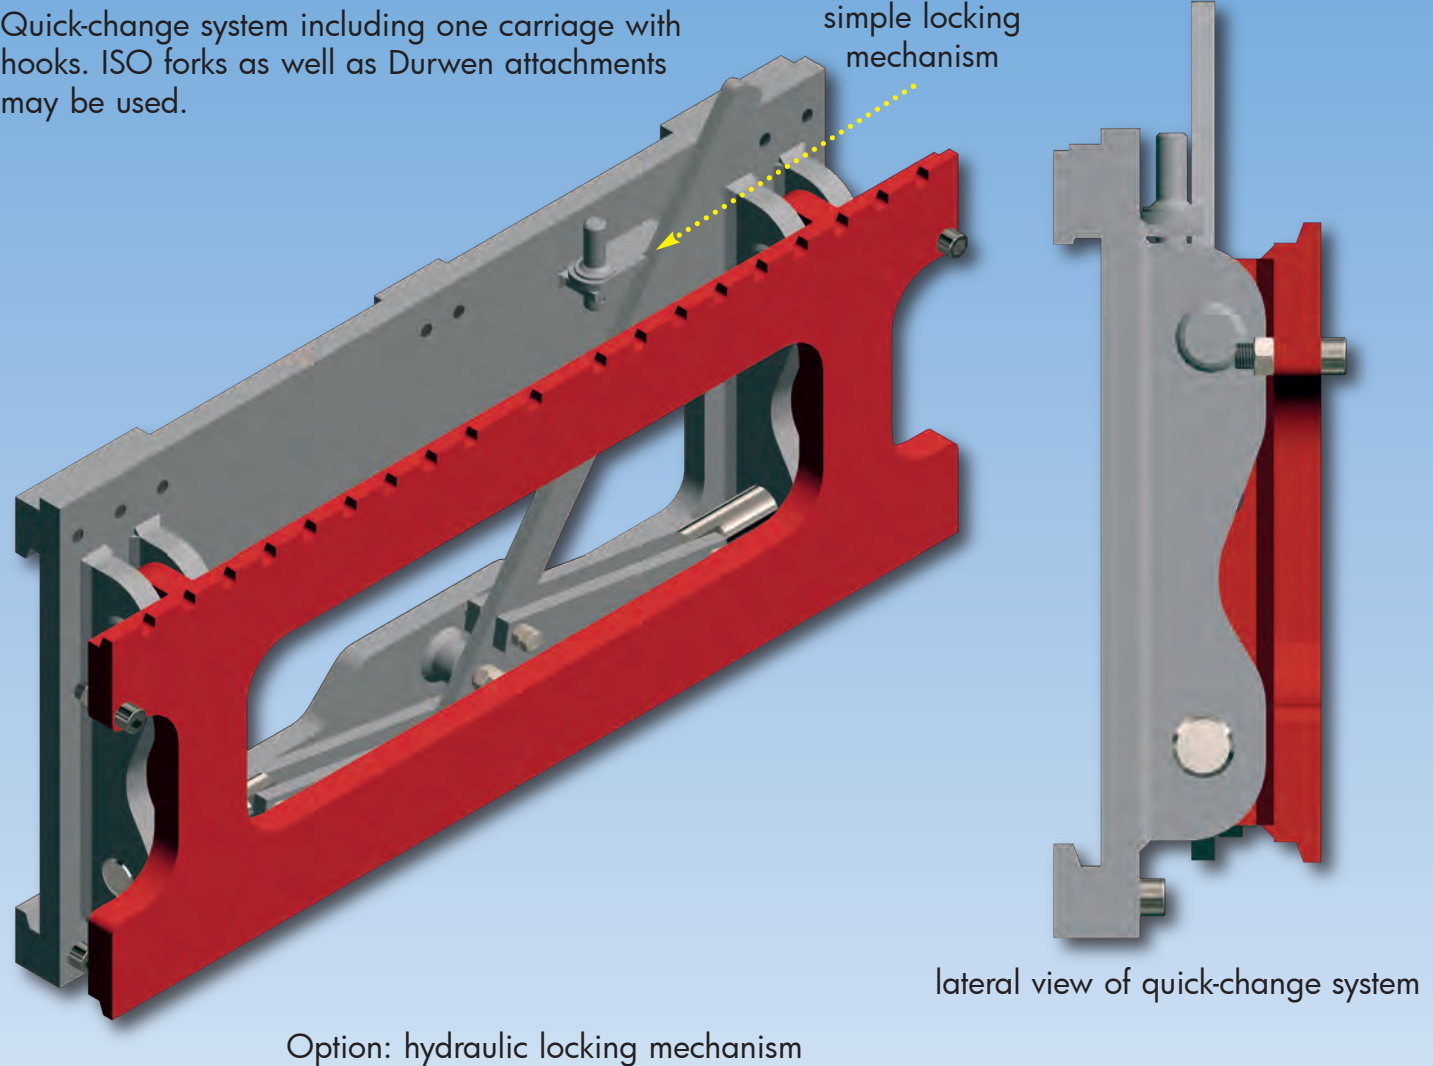

lateral view of quick-change system

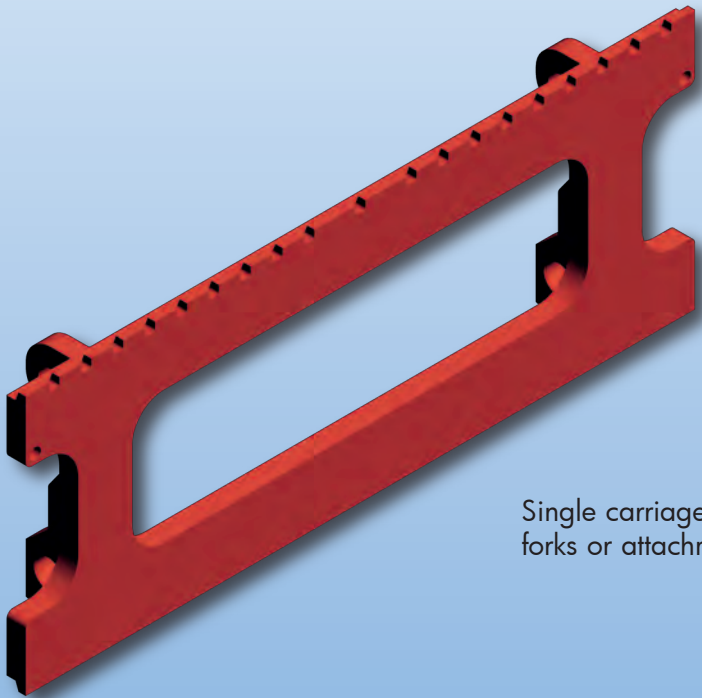

Single carriage with hooks for ISO forks or attachments

Quick-change system, base frame to hook onto the original carriage of the forklift truck.

type	capacity kg LC mm	for forklift to LC mm	ISO	B mm	LLC mm	COG mm	weight kg
SWV 25	2500/600	2500/600	II	1050	110	30	115
SWV 35	3500/600	3500/600	III	1050	150	32	145
SWV 45	5000/600	5000/600	III	1050	160	38	205

Quick-change system incl. one fork carriage with hooks, ISO forks as well as Durwen attachments can be mounted.

type	capacity kg LC mm	for forklift to LC mm	ISO	B mm	LLC incl. carriage mm	COG mm	weight kg
SWV-GT 25	2500/600	2500/600	II	1050	140	72	205
SWV-GT 35	3500/600	3500/600	III	1150	195	80	310
SWV-GT 45	5000/600	5000/600	III	1350	205	85	355

Single carriage with hooks, for additional ISO forks or Durwen attachments.

type	ISO	B mm	weight kg
fork carriage for SWV 25	II	1050	90
fork carriage for SWV 35	III	1150	105
fork carriage for SWV 45	III	1350	145

- forks not included

option constant sideshift (requires one additional hydraulic function)	add-on weight kg	increase of LLC mm
constant sideshift ISO II	+20 kg	+17 mm
constant sideshift ISO III	+25 kg	+17 mm

- hydraulic locking upon request
- parking stand rack for attachments upon request
- integrated version upon request
- multiple quick coupling upon request

Are you looking for a digital version
export@durwen.de

