


Container bale clamp

PBK-CR

container version, integral sideshift

The bale clamp PBK-CR features a cleared frame top and wear protections under frame and under arms. The hydraulic cylinders are covered by a cylinder protection as standard. It is ideal for loading and unloading containers. Frame and arms are wear protected.

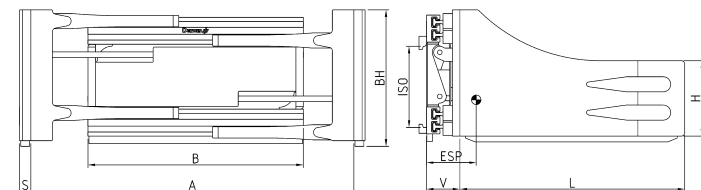

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A IT1 mm	height h mm	length L mm	S (max)* mm	V LLC mm	ESP COG mm	weight kg
PBK 30-CR	3,0	II/III	2700/500	530-1710	980	400	1000	30 (93)	168	228	620
				520-1700	980		1200	35 (98)		298	685
				570-1770	1050		1000	30 (93)		224	630
				560-1760	1050		1200	35 (98)		294	695
				570-1870	1150		1000	30 (93)		217	650
				560-1860	1150		1200	35 (98)		287	715
				610-2260	1350		1000	30 (93)		200	700
				600-2250	1350		1200	35 (98)		270	765
PBK 35-CR	3,5	III	3000/500	570-1870	1150	450	1000	40 (110)	171	220	855
				560-1860	1150		1200		181	290	930
				610-2260	1350		1000		171	215	910
				600-2250	1350		1200		181	285	985
PBK 40-CR	4,0	III	3200/600	600-2250	1350	450	1200	40 (110)	181	274	995
				590-2240	1350		1400			344	1065
				600-2350	1450		1200			269	1020
				590-2340	1450		1400			339	1090
PBK 45-CR	4,5-5,0	III	3600/600	520-2120	1350	450	1200	40 (116)	181	280	1000
				500-2100	1350		1600			399	1135
				520-2320	1550		1200			275	1055
				500-2300	1550		1600			394	1190
PBK 48-CR	5,0/600	III	4200/600	540-2120	1350	450	1200	40 (125)	191	270	1030
				520-2100	1350		1600			390	1160
				540-2320	1550		1200			265	1100
				520-2300	1550		1600			385	1230

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms and frame as standard
- cylinder protection as standard
- other arm lengths upon request

* ca., including rebar and pre-tension



DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024