


Fork clamp

**PGK
ISO IV**

integral sideshift, bolt-on forks

The **fork clamp PGK** can spread the forks beyond the attachment frame width. It can carry loads on the forks as well as clamped between the forks. The strong steel profiles allow for excellent visibility and minimised lost load centre. An integral sideshift is included as well as bolt-on forks.

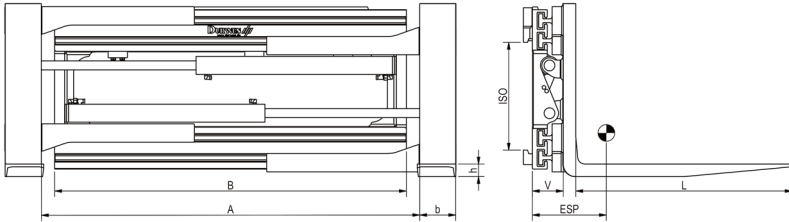

type	capacity on forks kg LC mm	capacity as clamp kg LC mm	lift truck to LC mm	ISO	B mm	opening range A IT1 mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PGK 50	5000/600	3500/600	5,0/600	IV	1250	250-1600	150x70x1200	158	225	815
					1350	250-1700			220	830
					1450	250-1800			218	845
					1550	250-1900			215	860
					1800	250-2150			210	895
PGK 60	6000/600	3800/600	6,0/600	IV	1300	250-1650	150x70x1200	158	235	830
					1450	250-1800			220	860
					1550	250-1900			210	880
					1800	250-2150			205	940
					2000	250-2350			200	1000
PGK 80	8000/600	4800/600	7,0-8,0/600	IV	1350	160-1500	200x70x1200	177	220	1260
					2000	160-2150			202	1500
					2200	160-2350			195	1570
					2400	160-2550			190	1640
PGK 100	8000/900	7500/600	8,0/900	IV	2000	160-2150	200x80x1200	185	213	1640
					2100	160-2250			210	1680
					2200	160-2350			205	1720
					2400	160-2550			200	1800
PGK 110	8000/1100	8000/600	8,0/1100	IV	2200	160-2060	200x100x1200	210	225	2420
PGK 120-I*	12000/1200	6500/1200	12,0/1200	integrated	2200 2400	200-2000 200-2200	250/220x120x1200	330	220 230	3800 3950
PGK 140-I*	14000/1200	7000/1200	14,0/1200	integrated	2200 2400	200-2000 200-2200	250/230x120x1200	330	235 240	3860 4010
PGK 160-I*	16000/1200	7500/1200	16,0/1200	integrated	2200 2400	200-2000 200-2200	250x120x1200	330	260 250	3940 4090

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- toe-in on forks as standard
- with pressure relief valve on the clamp function as standard

- load backrest type LS-K see page 239
- cylinder protection upon request (ISO IV)
- slip-on arms see page 237
- foundry/fishing version see page 234-235

* weight without brackets / COG is without brackets, from front edge of brackets / LLC is from front edge of brackets

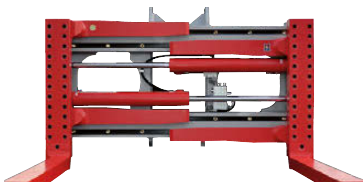


image shows type PGK 140-I

DURWEN
Forklift Attachments

More than 75 years experience