
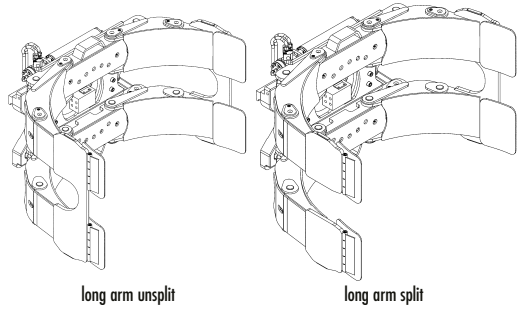


Paper roll clamp 360°

PRK 100
ISO IV

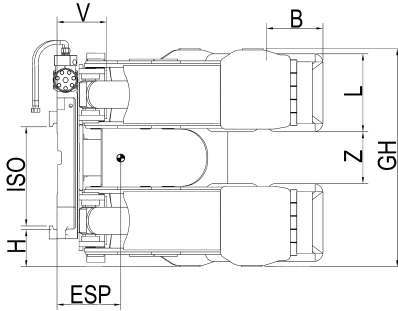

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 100 B - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	246	1360
PRK 100 B - 14	5500/725		450 - 1450							263	1440
PRK 100 B - 15	5300/760		480 - 1520							280	1470
PRK 100 B - 16	5000/800		550 - 1600							297	1510
PRK 100 B - 18	4600/915		580 - 1830							311	1630
PRK 100 B - 19	4300/950		600 - 1900							328	1670
PRK 100 B - 20	4000/1000		600 - 2000							345	1710
PRK 100 B - 21	3800/1050		650 - 2100							362	1750
long arm split											
PRK 100 TB - 13	5600/650	IV	400 - 1300	powered	1240	280x500	200	250	255	241	1350
PRK 100 TB - 14	5500/725		450 - 1450							258	1430
PRK 100 TB - 15	5300/760		480 - 1520							275	1460
PRK 100 TB - 16	5000/800		550 - 1600							292	1500
PRK 100 TB - 18	4600/915		580 - 1830							306	1620
PRK 100 TB - 19	4300/950		600 - 1900							323	1660
PRK 100 TB - 20	4000/1000		600 - 2000							340	1700
PRK 100 TB - 21	3800/1050		650 - 2100							350	1740

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241

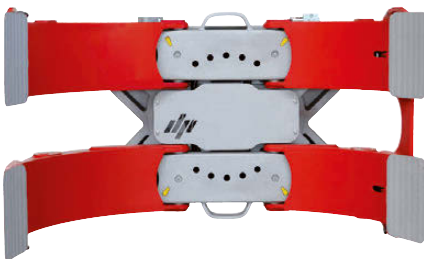


image shows unit complete with
optional centre cover

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024