
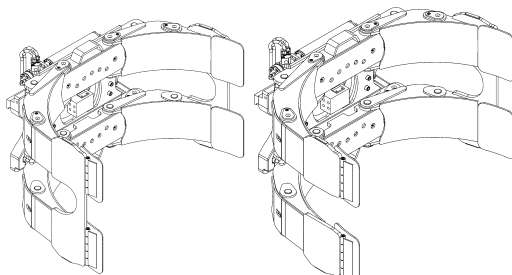


# Paper roll clamp 360°

**PRK 25**  
**ISO II/III**

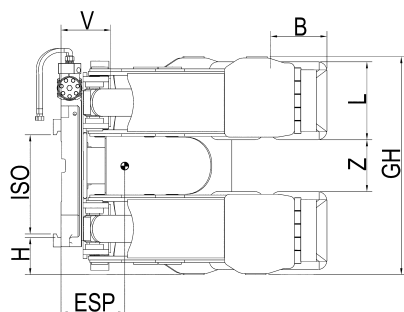

long arm unsplit

long arm split

| type             | capacity<br>kg<br>LC mm | ISO        | roll diameter<br>min - max<br>mm | short<br>arm | GH<br>mm | contact plates<br>B x L<br>mm | Z<br>mm | H<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|------------------|-------------------------|------------|----------------------------------|--------------|----------|-------------------------------|---------|---------|----------------|------------------|--------------|
| long arm unsplit |                         |            |                                  |              |          |                               |         |         |                |                  |              |
| PRK 25 B - 11    | 2000/575                | II/III     | 250 - 1150                       | powered      | 840      | 220x300                       | 200     | 143     | 184            | 200              | 565          |
| PRK 25 S - 11    | 2000/575                |            | 400 - 1150                       | fixed        |          |                               |         |         |                | 200              | 515          |
| PRK 25 B - 13    | 1800/650                |            | 250 - 1300                       | powered      |          |                               |         |         |                | 215              | 580          |
| PRK 25 S - 13    | 1800/650                |            | 400 - 1300                       | fixed        |          |                               |         |         |                | 215              | 530          |
| PRK 25 B - 14    | 1700/700                |            | 250 - 1400                       | powered      |          |                               |         |         |                | 225              | 590          |
| PRK 25 S - 14    | 1700/700                |            | 600 - 1400                       | fixed        |          |                               |         |         |                | 225              | 540          |
| PRK 25 B - 15    | 1600/760                |            | 250 - 1520                       | powered      |          |                               |         |         |                | 235              | 615          |
| PRK 25 S - 15    | 1600/760                |            | 600 - 1520                       | fixed        |          |                               |         |         |                | 235              | 580          |
| PRK 25 B - 16    | 1500/800                |            | 250 - 1600                       | powered      |          |                               |         |         |                | 248              | 653          |
| PRK 25 S - 16    | 1500/800                | 600 - 1600 | fixed                            | 248          | 600      |                               |         |         |                |                  |              |
| long arm split   |                         |            |                                  |              |          |                               |         |         |                |                  |              |
| PRK 25 TB - 11   | 2000/575                | II/III     | 250 - 1150                       | powered      | 840      | 220x300                       | 200     | 143     | 184            | 195              | 560          |
| PRK 25 TS - 11   | 2000/575                |            | 400 - 1150                       | fixed        |          |                               |         |         |                | 195              | 510          |
| PRK 25 TB - 13   | 1800/650                |            | 250 - 1300                       | powered      |          |                               |         |         |                | 210              | 575          |
| PRK 25 TS - 13   | 1800/650                |            | 400 - 1300                       | fixed        |          |                               |         |         |                | 210              | 525          |
| PRK 25 TB - 14   | 1700/700                |            | 250 - 1400                       | powered      |          |                               |         |         |                | 220              | 585          |
| PRK 25 TS - 14   | 1700/700                |            | 600 - 1400                       | fixed        |          |                               |         |         |                | 220              | 535          |
| PRK 25 TB - 15   | 1600/760                |            | 250 - 1520                       | powered      |          |                               |         |         |                | 240              | 610          |
| PRK 25 TS - 15   | 1600/760                |            | 600 - 1520                       | fixed        |          |                               |         |         |                | 240              | 572          |
| PRK 25 TB - 16   | 1500/800                |            | 250 - 1600                       | powered      |          |                               |         |         |                | 245              | 648          |
| PRK 25 TS - 16   | 1500/800                |            | 600 - 1600                       | fixed        |          |                               |         |         |                | 245              | 595          |

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO II), (ISO III) upon request
- force options see page 241

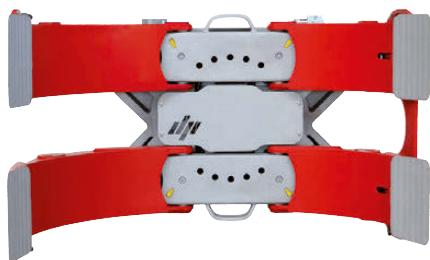


image shows unit complete with  
optional centre cover

**DURWEN**  
Forklift Attachments

More than 75 years experience

PL 01-2024