




Paper roll clamp 360°

PRK 80
ISO IV

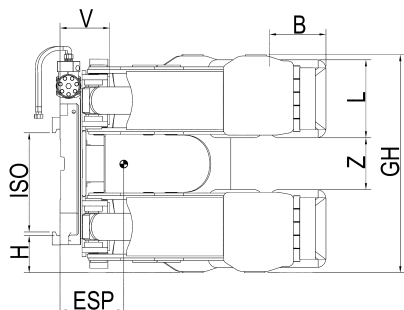

long arm unsplit



long arm split

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
long arm unsplit											
PRK 80 B - 13	5000/650	IV	250 - 1300	powered	1240	280x500	200	255	239	259	1330
PRK 80 S - 13	5000/650		500 - 1300	fixed						259	1325
PRK 80 B - 14	4800/725		250 - 1450	powered						271	1365
PRK 80 S - 14	4800/725		500 - 1450	fixed						271	1360
PRK 80 B - 15	4600/760		250 - 1520	powered						282	1395
PRK 80 S - 15	4600/760		450 - 1520	fixed						282	1390
PRK 80 B - 16	4500/800		250 - 1600	powered						291	1445
PRK 80 S - 16	4500/800		500 - 1600	fixed						291	1440
PRK 80 B - 18	3900/915		350 - 1830	powered						326	1495
PRK 80 S - 18	3900/915		650 - 1830	fixed						326	1490
PRK 80 B - 19	3600/950		350 - 1900	powered						343	1520
PRK 80 S - 19	3600/950		700 - 1900	fixed						343	1515
PRK 80 B - 20	3500/1000		350 - 2000	powered						360	1590
PRK 80 S - 20	3500/1000		700 - 2000	fixed						360	1585
PRK 80 B - 21	3300/1050		450 - 2100	powered						377	1685
PRK 80 S - 21	3300/1050		900 - 2100	fixed						377	1625
long arm split											
PRK 80 TB - 13	5000/650	IV	250 - 1300	powered	1240	280x500	200	255	239	254	1335
PRK 80 TS - 13	5000/650		500 - 1300	fixed						254	1330
PRK 80 TB - 14	4800/725		250 - 1450	powered						266	1370
PRK 80 TS - 14	4800/725		500 - 1450	fixed						266	1365
PRK 80 TB - 15	4600/760		250 - 1520	powered						277	1400
PRK 80 TS - 15	4600/760		450 - 1520	fixed						277	1395
PRK 80 TB - 16	4500/800		250 - 1600	powered						286	1440
PRK 80 TS - 16	4500/800		500 - 1600	fixed						286	1435
PRK 80 TB - 18	3900/915		350 - 1830	powered						321	1490
PRK 80 TS - 18	3900/915		650 - 1830	fixed						321	1485
PRK 80 TB - 19	3600/950		350 - 1900	powered						338	1515
PRK 80 TS - 19	3600/950		700 - 1900	fixed						338	1510
PRK 80 TB - 20	3500/1000		350 - 2000	powered						355	1585
PRK 80 TS - 20	3500/1000		700 - 2000	fixed						355	1580
PRK 80 TB - 21	3300/1050		450 - 2100	powered						372	1680
PRK 80 TS - 21	3300/1050		900 - 2100	fixed						372	1675

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request
- centre cover upon request

- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard, positioning at 45°, chose on order (no add-on price)
- 0° arm design upon request

- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241