



Paper roll clamp 180°

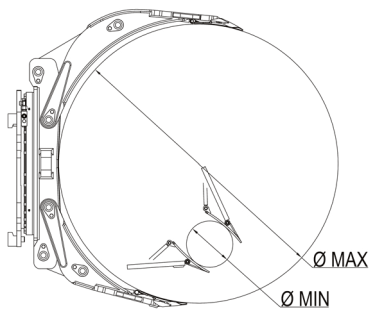

short arm powered

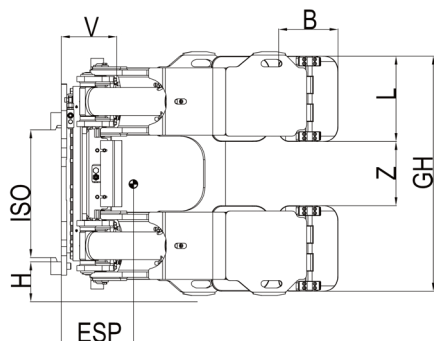

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 40 - long arm unsplit											
PRK 40 B-13-180	3000/650	III	250 - 1300	powered	1040	250x400	200	184	215	241	795
PRK 40 S-13-180	3000/650		500 - 1300	fixed						241	790
PRK 40 B-15-180	2650/760		250 - 1520	powered						265	850
PRK 40 S-15-180	2650/760		500 - 1300	fixed						265	845
PRK 40 B-16-180	2500/800		250 - 1600	powered						292	878
PRK 40 S-16-180	2500/800		600 - 1600	fixed						292	873
PRK 40 B-18-180	2100/915		350 - 1830	powered						301	925
PRK 40 S-18-180	2100/915		630 - 1830	fixed						301	920
PRK 40 - long arm split											
PRK 40 TB-13-180	3000/650	III	250 - 1300	powered	1040	250x400	200	184	215	234	785
PRK 40 TS-13-180	3000/650		500 - 1300	fixed						234	780
PRK 40 TB-15-180	2650/760		250 - 1520	powered						260	840
PRK 40 TS-15-180	2650/760		500 - 1300	fixed						260	835
PRK 40 TB-16-180	2500/800		250 - 1600	powered						287	868
PRK 40 TS-16-180	2500/800		600 - 1600	fixed						287	863
PRK 40 TB-18-180	2100/915		350 - 1830	powered						296	915
PRK 40 TS-18-180	2100/915		630 - 1830	fixed						296	910

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request

- with centre cover as standard
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III) upon request
- force options see page 241

