



Paper roll clamp 180°

PRK 45-180
ISO III

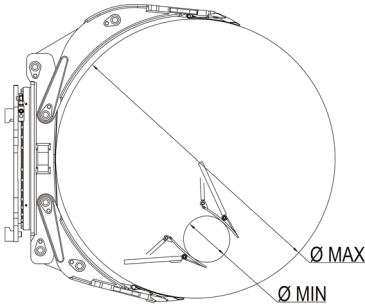

short arm powered

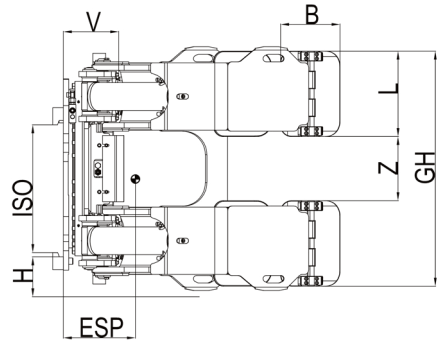


type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 45 - long arm unsplit											
PRK 45 B-13-180	3500/650	III	250 - 1300	powered	1040	250x400	200	184	215	262	830
PRK 45 S-13-180	3500/650		550 - 1300	fixed						262	825
PRK 45 B-15-180	3000/760		250 - 1520	powered						288	875
PRK 45 S-15-180	3000/760		650 - 1520	fixed						288	870
PRK 45 B-16-180	2800/800		250 - 1600	powered						315	895
PRK 45 S-16-180	2800/800		650 - 1600	fixed						315	890
PRK 45 B-18-180	2500/915		400 - 1830	powered						325	965
PRK 45 S-18-180	2500/915		650 - 1830	fixed						325	960
PRK 45 - long arm split											
PRK 45 TB-13-180	3500/650	III	250 - 1300	powered	1040	250x400	200	184	215	257	820
PRK 45 TS-13-180	3500/650		550 - 1300	fixed						257	815
PRK 45 TB-15-180	3000/760		250 - 1520	powered						283	865
PRK 45 TS-15-180	3000/760		650 - 1520	fixed						283	860
PRK 45 TB-16-180	2800/800		250 - 1600	powered						310	885
PRK 45 TS-16-180	2800/800		650 - 1600	fixed						310	880
PRK 45 TB-18-180	2500/915		400 - 1830	powered						320	955
PRK 45 TS-18-180	2500/915		650 - 1830	fixed						320	950

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request

- with centre cover as standard
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III) upon request
- force options see page 241

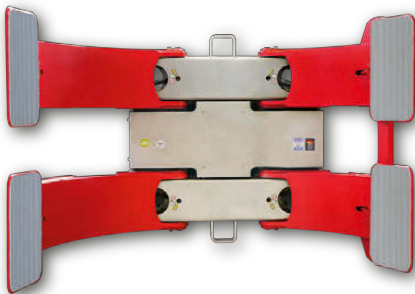

DURWEN
Forklift Attachments

More than 75 years experience