



Paper roll clamp 180°

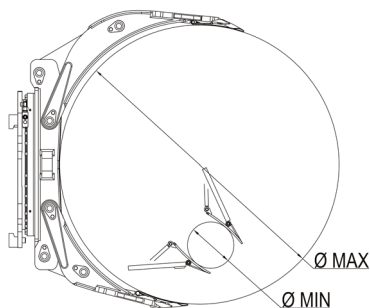

short arm powered

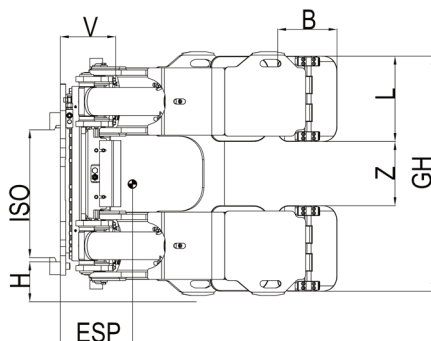

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 50 - long arm unsplit											
PRK 50 B-13-180	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	259	980
PRK 50 S-13-180	4000/650		500 - 1300	fixed						259	975
PRK 50 B-15-180	3800/760		250 - 1520	powered						287	1050
PRK 50 S-15-180	3800/760		500 - 1520	fixed						287	1045
PRK 50 B-16-180	3700/800		250 - 1600	powered						295	1060
PRK 50 S-16-180	3700/800		500 - 1600	fixed						295	1055
PRK 50 B-18-180	3400/915		350 - 1830	powered						317	1120
PRK 50 S-18-180	3400/915		630 - 1830	fixed						317	1115
PRK 50 - long arm split											
PRK 50 TB-13-180	4000/650	III/IV	250 - 1300	powered	1140	280x400	300	157/202	220	254	970
PRK 50 TS-13-180	4000/650		500 - 1300	fixed						254	965
PRK 50 TB-15-180	3800/760		250 - 1520	powered						282	1040
PRK 50 TS-15-180	3800/760		500 - 1520	fixed						282	1035
PRK 50 TB-16-180	3700/800		250 - 1600	powered						290	1050
PRK 50 TS-16-180	3700/800		500 - 1600	fixed						290	1045
PRK 50 TB-18-180	3400/915		350 - 1830	powered						312	1110
PRK 50 TS-18-180	3400/915		630 - 1830	fixed						312	1105

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request

- with centre cover as standard
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO III), (ISO IV) upon request
- force options see page 241

