



Paper roll clamp 180°

**PRK 80/100-
180 ISO IV/V**

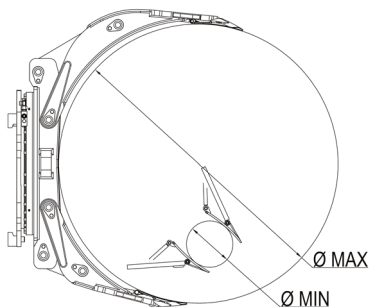

short arm powered

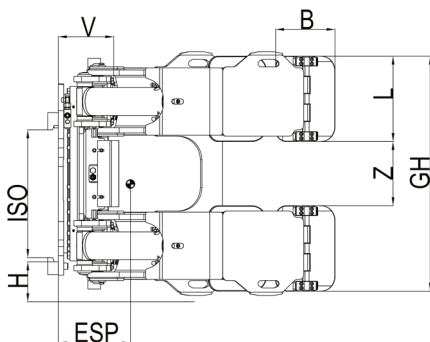

type	capacity kg LC mm	ISO	roll diameter min - max mm	short arm	GH mm	contact plates B x L mm	Z mm	H mm	V LLC mm	ESP COG mm	weight kg
PRK 80 - long arm unsplit											
PRK 80 B-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	281	1305
PRK 80 B-15-180	4600/760		250 - 1520							305	1353
PRK 80 B-16-180	4500/800		250 - 1600							317	1370
PRK 80 B-18-180	3900/915		350 - 1830							335	1385
PRK 80 B-21-180	3300/1050		450 - 2100							365	1490
PRK 80 - long arm split											
PRK 80 TB-13-180	5000/650	IV	250 - 1300	powered	1240	280x500	200	207	238	276	1295
PRK 80 TB-15-180	4600/760		250 - 1520							297	1343
PRK 80 TB-16-180	4500/800		250 - 1600							306	1360
PRK 80 TB-18-180	3900/915		350 - 1830							328	1375
PRK 80 TB-21-180	3300/1050		450 - 2100							355	1480
PRK 100 long arm unsplit											
PRK 100 B-15-180	5300/760	IV/V	480 - 1520	powered	1240	280x500	200	102	258	287	1480
PRK 100 B-16-180	5000/800		500 - 1600							305	1520
PRK 100 B-18-180	4600/915		580 - 1830							323	1580
PRK 100 B-21-180	3800/1050		650 - 2100							377	1700
PRK 100- long arm split											
PRK 100 TB-15-180	5300/760	IV/V	480 - 1520	powered	1240	280x500	200	102	258	282	1470
PRK 100 TB-16-180	5000/800		500 - 1600							300	1510
PRK 100 TB-18-180	4600/915		580 - 1830							318	1570
PRK 100 TB-21-180	3800/1050		650 - 2100							372	1690

- 2 hydraulic functions required
- includes hoses and couplings
- optional surfaces see page 68
- other surfaces upon request

- with centre cover as standard
- 160 bar pressure at entry required, less pressure results in less clamping force
- powered short arm sequential movement as standard

- 0° arm design upon request
- one piece contact plate per arm upon request
- load extender upon request
- quick release hooks (ISO IV) upon request
- force options see page 241

DURWEN 
Forklift Attachments

More than 75 years experience