


Paper roll clamp 180°, tilting

PRK-K-180
ISO III/IV/V

The **Durwen tilting paper roll clamp type PRK-K 180°** enables picking up of paper rolls in horizontal and vertical position. Due to the 90° forward tilt, horizontal rolls can be picked up and set down crosswise and lengthwise to the driving direction. The clamp has a rotation range of 180°. Due to the technically designed stop at 0° and 180° the roll always stands up straight so that edge damage is prevented when setting down the rolls.

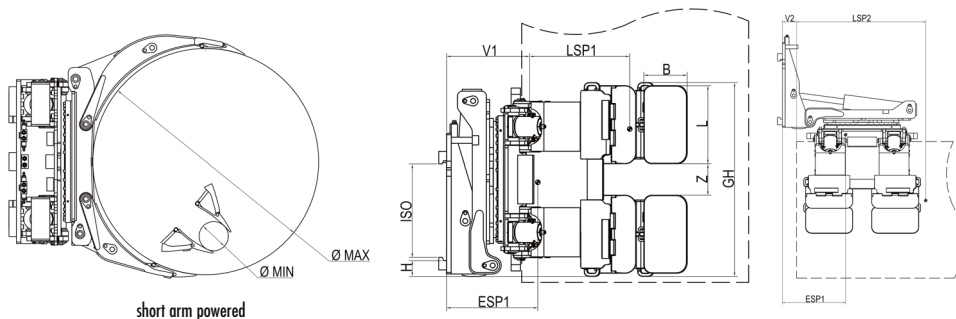

type	capacity kg LC mm	LC 1 / LC 2 mm	ISO	roll diameter min - max mm	short arm	GH mm	contact pla- tes B x L mm	Z mm	H mm	V1/ V2 LLC 1/2 mm	ESP 1/ ESP 2 COG 1/2 mm	weight kg
Tilting paper roll clamp - long arm unsplit												
PRK 40 B-13-D-K-180	3000	650/1200	III/IV	250-1300	powered	1040	250x400	200	30	455/100	268/498	1528
PRK 40 B-15-D-K-180	2650	760/1200	III/IV	250-1520		1040	250x400	200	30	455/100	288/516	1568
PRK 50 B-15-D-K-180	3600	760/1300	IV	250-1520		1140	280x400	300	30	495/100	393/662	1760
PRK 50 B-16-D-K-180	3500	800/1300	IV	250-1600		1140	280x400	300	30	495/100	399/669	1780
PRK 60 B-15-D-K-180	4200	760/1300	IV/V	250-1520		1240	280x500	200	80	513/100	412/703	1945
PRK 60 B-16-D-K-180	4000	800/1300	IV/V	250-1600		1240	280x500	200	80	513/100	418/706	1960
PRK 80 B-15-D-K-180	4600	760/1400	IV/V	250-1520		1240	280x500	200	80	653/100	532/823	2360
PRK 80 B-16-D-K-180	4500	800/1400	IV/V	250-1600		1240	280x500	200	80	653/100	532/823	2375
Tilting paper roll clamp - long arm split												
PRK 40 TB-13-D-K-180	3000	650/1200	III/IV	250-1300	powered	1040	250x400	200	30	455/100	268/498	1523
PRK 40 TB-15-D-K-180	2650	760/1300	III/IV	250-1520		1040	250x400	200	30	455/100	288/516	1563
PRK 50 TB-15-D-K-180	3600	760/1200	IV	250-1520		1140	280x400	300	30	495/100	393/662	1765
PRK 50 TB-16-D-K-180	3500	800/1300	IV	250-1600		1140	280x400	300	30	495/100	399/669	1785
PRK 60 TB-15-D-K-180	4200	760/1300	IV/V	250-1520		1240	280x500	200	80	513/100	412/703	1950
PRK 60 TB-16-D-K-180	4000	800/1300	IV/V	250-1600		1240	280x500	200	80	513/100	418/706	1965
PRK 80 TB-15-D-K-180	4600	760/1400	IV/V	250-1520		1240	280x500	200	80	653/100	532/823	2350
PRK 80 TB-16-D-K-180	4500	800/1400	IV/V	250-1600		1240	280x500	200	80	653/100	532/823	2365

- 3 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- contact plates with durable high friction cast grip as standard, optional with coating
- powered short arm sequential movement as standard
- hydraulic pressure of 160 bar required at forklift truck coupling, less pressure results in less clamping force
- 360° rotator upon request

- without rotator upon request
- conventional solenoid valve upon request (12 V, 24 V, 48 V, 80 V – please indicate)
- load extender upon request

DURWEN 
Forklift Attachments

More than 75 years experience