


# Pallet exchanger

**PWK  
30-AB-ST-H**

rotation, clamping, push-off function, side arm

**The pallet exchanger PWK 30** with hydraulic side arm and pusher is used for clamping loads and rotating them through 180°, allowing to load the goods without the pallet. Total rotation is 360°. The rotator uses a worm gear system protected against the ingress of dirt and will give a long service life. The hydraulic side arm provides additional stability to the clamped loads. The pusher pushes the loads off the attachment for palletless loading. The pallet can be removed manually. The unit is suitable for loading bagged or boxed goods. Stainless contact surfaces for the load avoid stain marks on the goods.

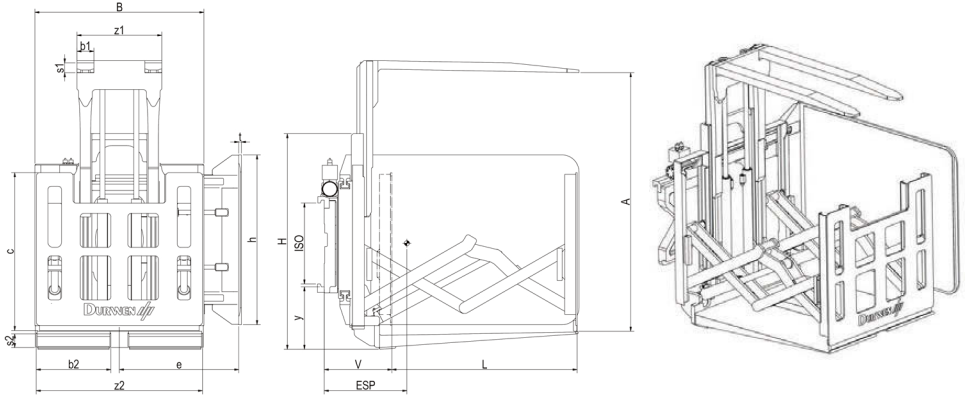

type	capacity clamp kg/mm LC	capacity side arm kg/mm LC	forklift capacity to	ISO	A opening range mm ITI	B frame width mm	H frame height mm	L useable length mm	c pusher height mm	b1 fork width mm	s1 fork thickness mm	z1 fork set spread mm	COG retracted mm	LLC mm	weight kg
PWK 30-AB-ST-H	1400/600	800/600	3,0	III	800-1520	1000	1320	1100	935	100	50	500	473	400	1375

- 2 hydraulic functions required
- 2 electric functions required
- includes pressure relief valve, hoses and couplings
- includes solenoid valves



**DURWEN**   
Forklift Attachments

More than 75 years experience

PL 01-2024