


Pulp clamp

PZK
ISO II/III

integral sideshift

The **pulp clamp PZK** is made with double T steel profiles. This type of profile supports excellent visibility through the clamp and allows for a reduced lost load centre. The smooth arms are low marking coated as standard. The clamp suits the needs for proper pulp handling.

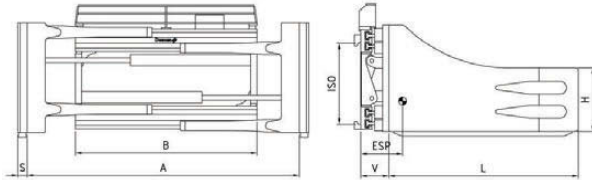

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	height H mm	length L mm	S (max) mm	V LLC mm	ESP COG mm	weight kg
PZK 20	1650/500	1,5-2,0/500	II	980	530-1710	350	800	30 (92)	128	198	435
				980	520-1700		1000			233	470
				1050	570-1770		800			194	445
				1050	560-1760		1000			229	480
PZK 25	2300/500	2,0-2,5/600	II	980	520-1700	350	1000	30 (92)	138	233	488
				980	510-1690		1200			283	523
				1050	560-1760		1000			229	500
				1050	550-1750		1200			283	535
				1150	560-1860		1000			222	520
				1150	550-1850		1200			277	555
PZK 30	2700/500	3,0/500	III	980	530-1710	400	1000	30 (93)	138	238	575
				980	520-1700		1200	35 (98)		308	640
				1050	570-1770		1000	30 (93)		234	585
				1050	560-1760		1200	35 (98)		304	650
				1150	570-1870		1000	30 (93)		227	605
				1150	560-1860		1200	35 (98)		297	670
				1350	610-2260		1000	30 (93)		210	655
				1350	600-2250		1200	35 (98)		280	720
PZK 35	3000/500	3,0/600- 3,5/500	III	1150	570-1870	450	1000	40 (110)	141	230	805
				1150	560-1860		1200			300	850
				1350	610-2260		1000			225	860
				1350	600-2250		1200			295	895
PZK 40	3200/600	3,5/600- 4,0/500	III	1150	560-1860	450	1200	40 (110)	141	290	910
				1150	550-1850		1400		151	360	990
				1350	600-2250		1200		141	285	930
				1350	590-2240		1400		151	355	1010
PZK 45	3600/600	4,0/600- 5,0/500	III	1350	520-2120	450	1200	40 (116)	151	290	950
				1350	500-2100		1600			409	1085
				1550	600-2450		1200			258	980
				1550	580-2430		1600			404	1115
PZK 48	4200/600	5,0/600	III	1350	540-2120	450	1200	40 (125)	161	280	980
				1350	520-2100		1600			400	1110
				1550	620-2470		1550			275	1010
				1550	600-2450		1550			395	1140

- 2 hydraulic functions required
- includes hoses and couplings
- wear strips welded under arms as standard
- with protection strip as standard
- load backrest type LS-K see page 239

- cylinder protection (ISO II/III) upon request
 - wear strips under frame upon request (ISO II/III)
 - constant sideshift upon request
- PZK 20 up to 1300 mm long arms
PZK 25 up to 1300 mm long arms

- PZK 30 up to 1700 mm long arms
PZK 35 up to 1800 mm long arms
PZK 40, 45, 48 up to 1700 mm long arms
- longer arms upon request
- * ca., including rebar and pre-tension

DURWEN 
Forklift Attachments

More than 75 years experience