

Multi fork positioner

VDPK-C
VDRPK-C

with load-extender for 1-2 and 1-2-3 pallets

The double fork positioner VDPK-C with load-extender can load and unload trailers from one side.

Additionally, the attachment has all the advantages of the double fork positioner, i.e. sideshift, slim forks, handling of one or two pallets and positioning the pallets together. The stroke of the load-extender is sufficient for the standard vehicle width of 2400 mm. Model VDRPK-C is made for handling of 1, 2 or 3 pallets.

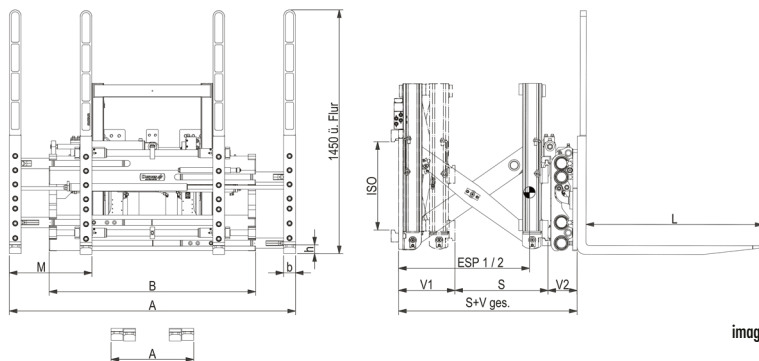


image shows VDPK

double fork positioner for 1+ 2 pallets

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A OTO mm	M mm	forks b x h x L mm	stroke S mm	sideshift mm	V1+V2 LLC mm	ESP I COG I mm	ESP II COG II mm	weight kg
VDPK 25-C	2400/600	3,5/500	II/III	1200	560-1940	560	80x40x1200	620	+/- 100	520	340	870	970
VDPK 45-C	2600/600	4,5- 5,0/600	III				80x50x1200	650		545	365	820	1190
VDPK 50-C	2600/600	5,0/600	IV				80x50x1200	650		545	365	820	1210

triple fork positioner for 1, 2 and 3 pallets

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	opening range A OTO mm	M/N mm	forks b x h x L mm	stroke S mm	sideshift mm	V1+V2 LLC mm	ESP I COG I mm	ESP II COG II mm	weight kg
VDRPK 45-C	3000/600	5,0/600	III	1550	560-2285	510/560	60x50x1200	650	+/- 125	553	400	680	1395
VDRPK 60-C	3800/600	6,0/600	IV							553	440	720	1455
VDRPK 70-C	3900/600	7,0/600	IV							553	455	735	1485
VDRPK 80-C	4500/600	8,0/600	IV							600	370	760	1880

- 3 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- solenoid valve upon request
(12 V, 24 V, 48 V, 80 V - please specify)



automatic lubrication system:

VDPK-C upon request

VDRPK-C upon request

- optional with high visibility load backrest
ISO II, III upon request, ISO IV not available

image shows VDPK 45-C with
optional high visibility load
backrest



COG 1 = retracted

COG 2 = extended

DURWEN
Forklift Attachments

More than 75 years experience