




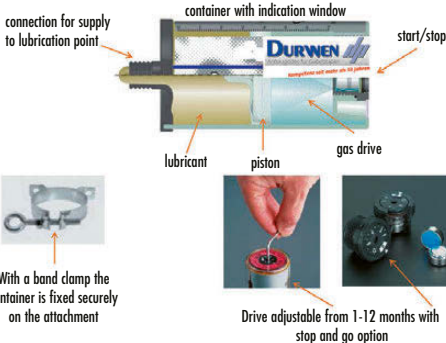



Accessories

automatic lubrication / auto lube system				
				
1: lubricant 2: piston 3: gas drive	hose connection to access point	adjustable drive unit, from stop to 12 months	easy to adjust and to check	ecological : container can be refilled!
 <p>connection for supply to lubrication point</p> <p>container with indication window</p> <p>start/stop</p> <p>lubricant</p> <p>piston</p> <p>gas drive</p> <p>With a band clamp the container is fixed securely on the attachment</p> <p>Drive adjustable from 1-12 months with stop and go option</p>			 <p>for sideshift top and bottom (4 units) DPK 16-30 upon request for sideshift top (2 units) DPK 35-80/DRPK/SPK upon request</p>	

conventional 6/2 solenoid valve 12, 24, 48 or 80 Volt, indicate voltage	2 hoses with couplings, 1 set (length 650/800/1000)	pressure gauge 0-400 bar
		

lower quick release hooks ISO II	lower quick release hooks ISO III	lower quick release hooks ISO IV
		

pressure relief valve 30-150 bar	3 stage pressure relief valve, pressure set manually
