


Sideshifting 360° rotator

DG-S



constant sideshift

The **rotator DG-S** has a cast steel frame enabling compact design. The worm gear has several teeth meshing at one time thus helping to increase the service life of the attachment. A seal fitted as standard protects the rotator against the ingress of dirt and dust. DG-S is equipped with constant sideshift ± 100 mm.

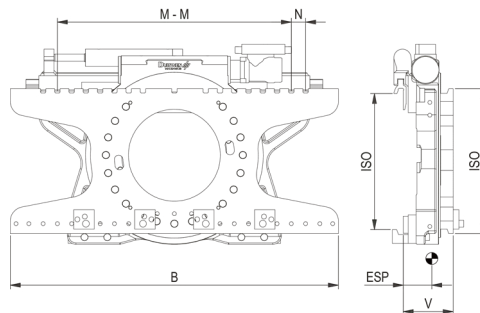

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	centre distance M-M mm	N mm	max. torque ΔP 130 bar Nm	sideshift mm	V LLC mm	ESP COG mm	weight kg
DG 16-S	1600/500	1,5-1,8/500	II	880	260-660	50	5200	± 100	166	85	264
DG 20-S	2000/500	2,0/500	II	980	260-760		5200		166	87	270
DG 25-S	2500/600	2,5/600	II	1080	260-860		9400		149	72	314
DG 30-S	3000/500	3,0/500	III	1150	320-920		9400		175	90	375
DG 35-S	3500/500	3,0/600- 3,5/500	III	1150	320-920		11700		180	92	385
DG 40-S	4000/500	3,5/600- 4,0/500	III	1150	310-910		14000		193	95	550
DG 45-S	5000/600	4,0-5,0/600	III	1350	310-1110		14000		193	97	565
DG 50-S	5000/600	5,0/600	IV	1380	310-1110		14000		220	110	730
DG 60-S	6000/600	6,0/600	IV	1500	310-1210		22000		228	118	883
DG 80-S	8000/600	7,0-8,0/600	IV	1750	380-1480		22000		238	128	968
DG 100-S	8000/900	8,0/900	IV	1750	380-1480		26000		251	130	1020
DG 120-S	12000/600	8,0/1100- 12,0/600	IV	1850	380-1580		26000		251	133	1128

- 2 hydraulic functions required
- includes hoses and couplings
- safety valve as standard
- constant sideshift as standard
- options see page 235, 238
- quick release hooks: (ISO II, III, IV) upon request
- forks not included
- hook-on forks reinforced for rotator use must be used

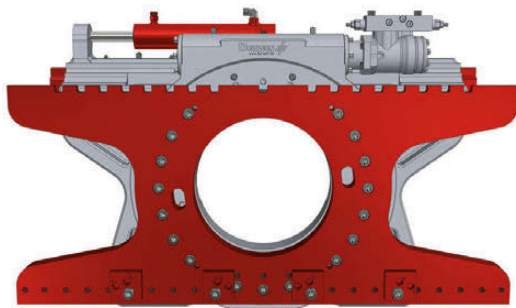

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024