


Revolving fork positioner

DZVW-G

360° total rotation, bolt-on forks

The revolving fork positioner **DZVW-G** rotates 360° and is designed for emptying bins and boxes with closed fork pockets. The strong construction with round bars guarantees a long service life. The rotator has a strong direct transmission with proven service in heavy-duty applications. The rotation bearing is protected against dust. The unit is not designed for use with inverted forks. Suitable solutions upon request.

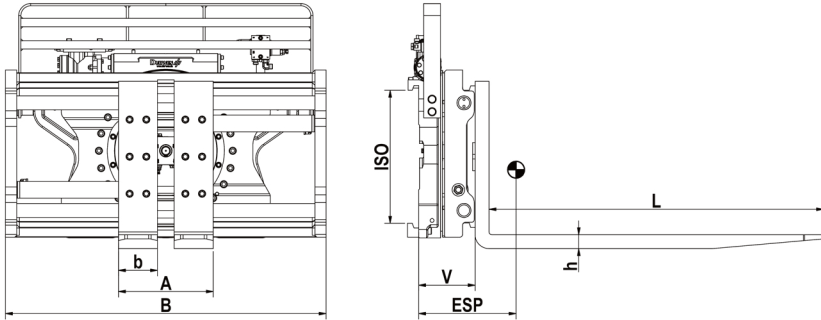


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm OTO	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
DZVW 16-G*	1600/500	1,6/500	II	1000	300-880	100x40x1200	196	192	445
DZVW 20-G*	2000/500	1,8-2,0/500	II	1000	300-880	100x45x1200	196	204	458
DZVW 25-G*	2500/500	2,0/600 - 2,5/500	II	1150	320-1050	120x40x1200	200	200	521
DZVW 28-G*	2500/600	2,5/600	II	1150	325-1055	125x45x1200	200	215	541
DZVW 30-G*	3000/500	3,0/500	III	1150	325-1055	125x45x1200	203	211	584
DZVW 35-G	3500/500	3,0/600 - 3,5/500	III	1150	340-1070	140x50x1200	203	233	620
DZVW 40-G	4000/600	3,5/600 - 4,0/600	III	1350	370-1250	140x50x1200	236	211	845
DZVW 45-G	5000/600	3,5-5,0/600	III	1350	380-1260	150x60x1200	236	236	894
DZVW 50-G	5000/600	5,0/600	IV	1350	380-1260	150x70x1200	243	235	1030
DZVW 60-G	6000/600	6,0/600	IV	1420	380-1300	150x70x1200	253	218	1230
DZVW 80-G	8000/600	7,0-8,0/600	IV	1800	480-1680	200x70x1200	283	257	1576

- 2 hydraulic functions required
- includes hoses and couplings
- features bolt-on forks as standard
- pressure relief valve as standard

- standard with protection strip type SB-DG (does not rotate)
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)

- forks longer than 1800 mm upon request
- clamping of goods is not allowed
- not available without forks

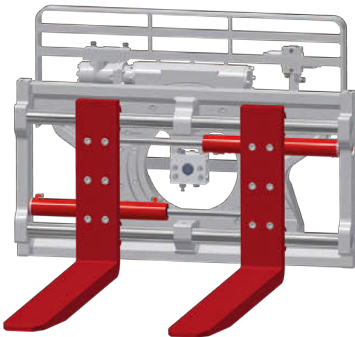

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
DZVW 16-G	100x50
DZVW 20-G	100x50
DZVW 25-G	120x50
DZVW 28-G	125x50
DZVW 30-G	125x50

DURWEN
Forklift Attachments

More than 75 years experience