

Push Pull - Pusher

**KA
AS**

The **push pull KA** is designed to handle load that is placed on slip sheets. The installation is quick and easy due to fork pockets and quick couplings. The unit features a stable scissor mechanism and strong grip for the slip sheets.

The **pusher AS** only pushes off load that is loaded on the platens.

The types **ISO** and **ISO-S** are carriage mounted.






image = KA 16-2-GZ

type	capacity kg/mm LC	platen length PL mm	platen width PB mm	platen oto GB mm	total width GB mm	push platen width SB mm	push platen height SH mm	max. fork width mm	max. fork thickness mm	stroke S mm	V LLC mm	ESP COG mm	weight kg
fork mounted													
KA 16-1-GZ	1600/610	1220	380	860	1010	1000	1000	150	40-50	1275	165	278/778	325
KA 16-2-GZ			450	1000	1150						165	298/778	335
AS 16-1-GZ			380	860	1010						165	293/705	290
AS 16-2-GZ			450	1000	1150						165	315/708	305
fork mounted with sheet saver													
KA 16-1-GZ-P	1600/610	1220	380	860	1010	1000	1000	150	40-50	1275	250	295/712	382
KA 16-2-GZ-P			450	1000	1150						250	313/714	395
mounting class ISO II A													
KA 16-1-ISO	1600/610	1220	380	860	1050	1000	1000	-	-	1275	165	319/621	512
KA 16-2-ISO			450	990	1180			-	-		165	340/620	555
AS 16-1-ISO			380	860	1050			-	-		165	331/579	480
AS 16-2-ISO			450	990	1180			-	-		165	353/572	525
mounting class ISO II A, constant sideshift													
KA 16-1-ISO-S	1600/610	1220	380	860	1050	1000	1000	-	-	1275	210	352/582	572
KA 16-2-ISO-S			450	1000	1180			-	-		210	381/580	615
pusher only, no platen													
AS 16-1-ISO-OT	-	-	-	800	800	800	1000	-	40-50	1275	245	138/576	250
backrest kit required if backrest installed													
KA 16-1-GZ with spacer kit	1600/610	1220	380	860	1010	1000	1000	150	40-50	1275	235	325/790	348
KA 16-2-GZ with spacer kit			450	1000	1150						235	345/792	358

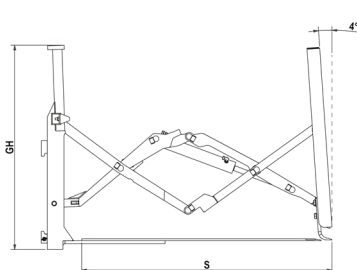

- 1 hydraulic function required (2 hydraulic functions type KA-ISO-S, KA-GZ-P)
- includes hoses and couplings
- other sizes upon request
- multifaster coupling system upon request
- max. fork length 1220 mm (1100 recommended)
- backrest kit required for combined use

images shows type KA 16-2-GZ-P

DURWEN
Forklift Attachments

More than 75 years experience