


Load backrest

LS-K

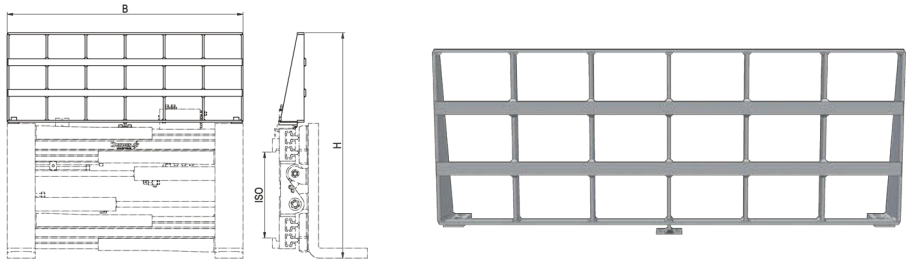

Load backrest for clamps and fork positioners based on clamp design for PGK-S (P. 31-32), PGK (P. 33-34), DGK (P. 44), DGK-S (P. 45), USK (P. 48), UKK (P. 62-64), ZVP-S (P. 99-101), ZVP (P. 102-103), ZVP-AS (P. 104), ZVP-A (P. 105), ZVP for reach trucks (P. 106-107)

type	ISO	B mm	height* H mm
LS-K 25	II	720-1100 1110-1350	1000
LS-K 45	III	980-1150 1160-1350 1360-1550 1560-1750	1200
LS-K 80	IV	1350-1800 1810-2400	1500

● other widths upon request

* with ISO 2328 A

Load backrest for bale clamps for PBK (P. 50-51), PZK (P. 54-55), PBK-CR (P. 53)

type	ISO	width B mm	height** H mm
LS-K 25	II	720-1100 1110-1350	1000
LS-K 45	III	980-1150 1160-1350 1360-1550 1560-1750	1200
LS-K 80	IV	1350-1800 1810-2400	1400

● other widths upon request

● LS-K 25 for bale clamps max height 1200 mm, higher upon request only

* with ISO 2328 A