


Sideshifting fork positioner

PZV-GC

container version, integral sideshift, bolt-on forks

The **sideshifting fork positioner PZV-GC** uses T-profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. This container version is equipped with bolt-on forks. The enhanced sideshift eases loading in tight areas like containers and trailers.

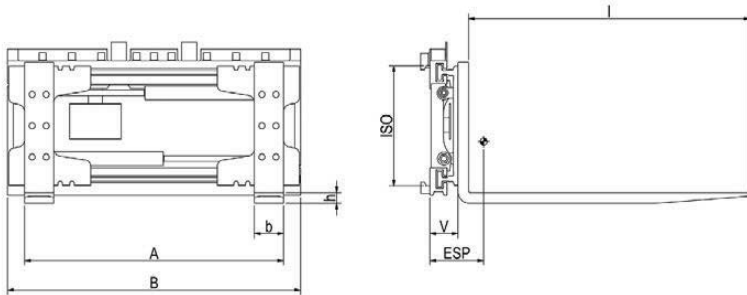

type	capacity kg/mm LC	forklift capacity to	ISO	B mm	A mm	forks b x h x l mm	max. sideshift (with fully closed forks) mm	V LLC mm	ESP COG mm	weight kg
PZV 25-GC	2500/500	1,5-2,5	II	1040 1150	510-870 560-1010	120x40x1200	+/- 180 mm, via valve +/- 225, via valve	114	215 212	265 273
PZV 28-GC	2500/600	2,5/600	II	1040 1150	510-870 560-1010	125x45x1200	+/- 180 mm, via valve +/- 225, via valve	119	220 215	295 300
PZV 30-GC	3000/500	3,0/500	III	1150 1250	560-1010 565-1105	125x45x1200	+/- 225 mm, via valve +/- 270, via valve	119	210 205	318 325
PZV 35-GC	3500/500	3,5/500	III	1150 1250	560-1010 565-1105	140x50x1200	+/- 225 mm, via valve +/- 270, via valve	119	215 210	357 367
PZV 45-GC	5000/500	4,0-5/500	III	1250 1400	565-1105 565-1185	150x60x1200	+/- 270 mm, via valve +/- 310, via valve	129	230 220	441 455

- 2 hydraulic functions required
- including hoses and couplings
- clamping of goods not allowed
- including bolt-on forks
- protection strip/load backrest see page 240