


Fork positioner

PZV-GSI
ISO III

integrated, constant sideshift, bolt-on forks

The fork positioner **PZV-GSI** uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. A constant sideshift allows the entire sideshift to be used in any fork position. Also prepared for the use of standard forks according to ISO 2328. Low weight and a small lost load center support a very good residual capacity. Bolt-on forks are included.

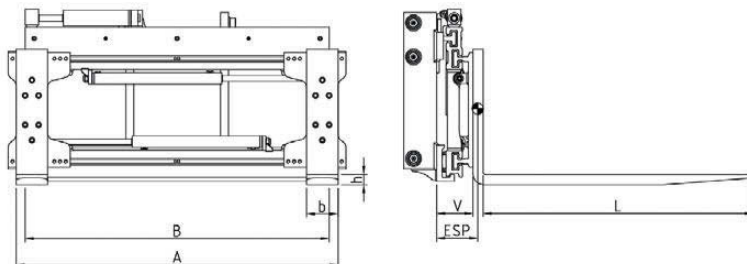


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
PZV 30-GSI*	3000/500	3,0/500	III	1040 1150 1350	475-1105 475-1215 475-1415	125x45x1200	+/-100	146	210 208 200	398 406 423
PZV 35-GSI	3500/500	3,0/600- 3,5/500		1150 1350	490-1230 490-1430	140x50x1200		146	215 205	451 468
PZV 45-GSI	5000/500	3,5/600- 5,0/500		1150 1350 1450	490-1230 490-1430 490-1530	150x60x1200		162	233 223 220	580 598 604
PZV 48-GSI	5000/600	5,0/600		1310 1350 1550	490-1390 490-1430 490-1630	150x60x1200		162	225 220 215	600 605 623

- 2 hydraulic functions required
- without hoses and couplings
- constant sideshift as standard
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
PZV 30-GSI	125x50

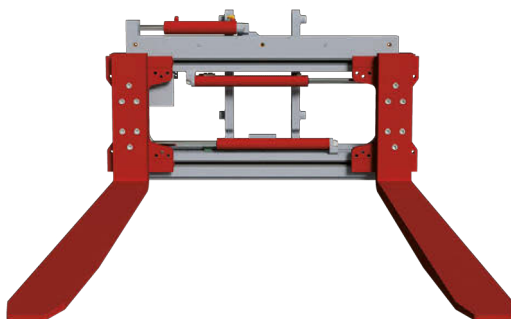

DURWEN 
Forklift Attachments

More than 75 years experience

PL 01-2024