


Fork positioner

integrated, constant sideshift, bolt-on forks

The fork positioner PZV-GSI uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. A constant sideshift allows the entire sideshift to be used in any fork position. Also prepared for the use of standard forks according to ISO 2328. Low weight and a small lost load center support a very good residual capacity. Bolt-on forks are included.

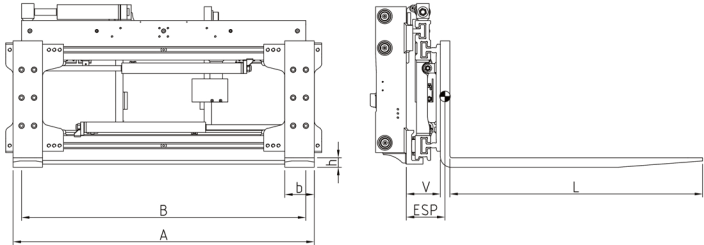

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
PZV 50-GSI	5000/600	5,0/600	IV	1250 1350 1450	490-1330 490-1430 490-1530	150x70x1200	+/-100	177	230 225 220	660 675 685
PZV 60-GSI	6000/600	6,0/600		1460 1860	560-1560 560-1960	150x70x1200	+/-100 +/-160	190	210 200	880 950
PZV 70-GSI	7000/600	6,5-7,0/600		1860 2060	560-1960 560-2160	150x70x1200	+/-160	190	200 190	950 990
PZV 80-GSI	8000/600	8,0/600		1800 1860 2060 2260 2400	560-1900 560-1960 560-2160 560-2360 560-2500	200x70x1200	+/-160	190	202 200 198 192 190	1055 1070 1110 1160 1200
				2060 2260 2400	560-2160 560-2360 560-2500				193 190 185	1610 1660 1700
				2060 2260 2400	560-2160 560-2360 560-2500				193 190 185	1610 1660 1700
				2060 2260 2400	560-2160 560-2360 560-2500				193 190 185	1610 1660 1700
				2060 2260 2400	560-2160 560-2360 560-2500				193 190 185	1610 1660 1700
PZV 100-GSI	8000/900	8,0/900		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	+/-160	227	193 190 185	1610 1660 1700
PZV 110-GSI	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	+/-160	227	193 190 185	1610 1660 1700

- 2 hydraulic functions required
- without hoses and couplings
- constant sideshift as standard
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor

- and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets

- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

