


# Sideshifting fork positioner

**PZV-GS**  
**ISO IV**

constant sideshift, bolt-on forks

The **sideshifting fork positioner PZV-GS** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.

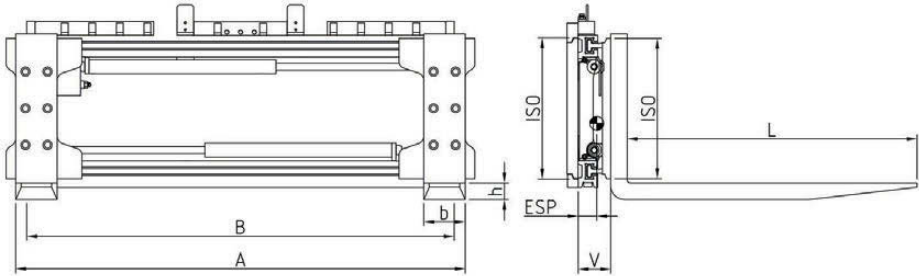

| type       | capacity<br>kg/mm<br>LC | lift truck<br>capacity<br>to | ISO | A<br>mm  | B<br>mm | sideshift<br>mm   | forks<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|------------|-------------------------|------------------------------|-----|----------|---------|-------------------|-------------|----------------|------------------|--------------|
| PZV 50-GS  | 5000/600                | 5,0/600                      | IV  | 490-1330 | 1250    | +/-100            | 150x70x1200 | 158            | 295              | 610          |
|            |                         |                              |     | 490-1430 | 1350    |                   |             |                | 290              | 620          |
|            |                         |                              |     | 490-1530 | 1450    |                   |             |                | 285              | 630          |
| PZV 60-GS  | 6000/600                | 6,0/600                      | IV  | 560-1560 | 1460    | +/- 100<br>+/-160 | 150x70x1200 | 166            | 275              | 780          |
|            |                         |                              |     | 560-1960 | 1860    |                   |             |                | 255              | 860          |
| PZV 80-GS  | 8000/600                | 7,0-8,0/600                  | IV  | 560-1900 | 1800    | +/-160            | 200x70x1200 | 166            | 260              | 970          |
|            |                         |                              |     | 560-1960 | 1860    |                   |             |                | 255              | 980          |
|            |                         |                              |     | 560-2160 | 2060    |                   |             |                | 250              | 1020         |
|            |                         |                              |     | 560-2360 | 2260    |                   |             |                | 245              | 1060         |
|            |                         |                              |     | 560-2500 | 2400    |                   |             |                | 240              | 1090         |
| PZV 100-GS | 8000/900                | 8,0/900                      | IV  | 560-2160 | 2060    | +/-160            | 200x80x1200 | 194            | 265              | 1180         |
|            |                         |                              |     | 560-2360 | 2260    |                   |             |                | 255              | 1220         |
|            |                         |                              |     | 560-2500 | 2400    |                   |             |                | 245              | 1250         |
| PZV 110-GS | 8000/1100               | 8,0/1100                     | IV  | 560-2160 | 2060    | +/-160            | 200x80x1200 | 194            | 265              | 1180         |
|            |                         |                              |     | 560-2360 | 2260    |                   |             |                | 255              | 1220         |
|            |                         |                              |     | 560-2500 | 2400    |                   |             |                | 245              | 1250         |

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- bolt-on forks as standard
- for hook-on forks ISO 2328
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed