


# Sideshifting fork positioner

**PZV-G**  
**ISO II/III**

integral sideshift, bolt-on forks

The **sideshifting fork positioner PZV-G** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. The integral sideshift depends on the actual fork position.

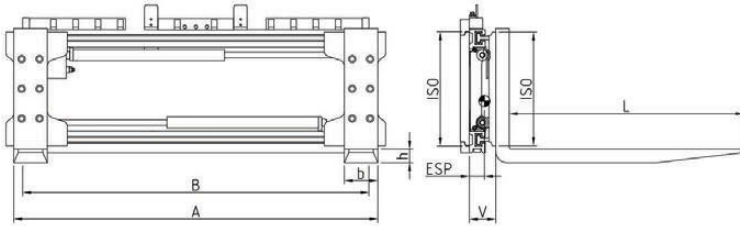

| type      | capacity<br>kg/mm<br>LC | lift truck<br>capacity<br>to | ISO | A<br>mm  | B<br>mm | forks<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|-----------|-------------------------|------------------------------|-----|----------|---------|-------------|----------------|------------------|--------------|
| PZV 16-G* | 1600/500                | 1,6/500                      | II  | 470-910  | 850     | 100x40x1200 | 105            | 240              | 255          |
|           |                         |                              |     | 470-1040 | 980     |             |                | 230              | 260          |
|           |                         |                              |     | 470-1100 | 1040    |             |                | 225              | 270          |
| PZV 20-G* | 2000/500                | 1,8/500-2,0/500              | II  | 470-910  | 850     | 100x45x1200 | 105            | 250              | 249          |
|           |                         |                              |     | 470-1040 | 980     |             |                | 240              | 259          |
|           |                         |                              |     | 470-1110 | 1040    |             |                | 235              | 264          |
|           |                         |                              |     | 470-1210 | 1150    |             |                | 230              | 272          |
| PZV 25-G* | 2500/500                | 2,0/600-2,5/500              | II  | 490-1060 | 980     | 120x40x1200 | 105            | 255              | 284          |
|           |                         |                              |     | 490-1120 | 1040    |             |                | 245              | 287          |
|           |                         |                              |     | 490-1180 | 1100    |             |                | 240              | 291          |
|           |                         |                              |     | 490-1230 | 1150    |             |                | 235              | 296          |
| PZV 28-G* | 2500/600                | 2,5/600                      | II  | 490-1120 | 1040    | 125x45x1200 | 105            | 255              | 294          |
|           |                         |                              |     | 490-1180 | 1100    |             |                | 250              | 299          |
|           |                         |                              |     | 490-1230 | 1150    |             |                | 245              | 304          |
| PZV 30-G* | 3000/500                | 3,0/500                      | III | 490-1120 | 1040    | 125x45x1200 | 113            | 255              | 312          |
|           |                         |                              |     | 490-1230 | 1150    |             |                | 250              | 320          |
|           |                         |                              |     | 490-1280 | 1200    |             |                | 245              | 325          |
|           |                         |                              |     | 490-1330 | 1250    |             |                | 240              | 330          |
|           |                         |                              |     | 490-1430 | 1350    |             |                | 230              | 340          |
| PZV 35-G  | 3500/500                | 3,0/600-3,5/500              | III | 490-1120 | 1040    | 140x50x1200 | 113            | 280              | 347          |
|           |                         |                              |     | 490-1230 | 1150    |             |                | 275              | 355          |
|           |                         |                              |     | 490-1280 | 1200    |             |                | 270              | 360          |
|           |                         |                              |     | 490-1330 | 1250    |             |                | 265              | 365          |
|           |                         |                              |     | 490-1430 | 1350    |             |                | 255              | 375          |
| PZV 45-G  | 5000/500                | 3,5/600-5,0/500              | III | 490-1230 | 1150    | 150x60x1200 | 120            | 300              | 444          |
|           |                         |                              |     | 490-1330 | 1250    |             |                | 290              | 454          |
|           |                         |                              |     | 490-1380 | 1300    |             |                | 285              | 459          |
|           |                         |                              |     | 490-1390 | 1310    |             |                | 282              | 460          |
|           |                         |                              |     | 490-1430 | 1350    |             |                | 280              | 465          |
|           |                         |                              |     | 490-1530 | 1450    |             |                | 270              | 475          |
| PZV 48-G  | 5000/600                | 5,0/600                      | III | 490-1390 | 1310    | 150x60x1200 | 120            | 278              | 465          |
|           |                         |                              |     | 490-1430 | 1350    |             |                | 275              | 470          |

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- protection strip/load backrest see page 240
- clamping of goods not allowed

\*Forks longer 1600 mm cross section changes

| type     | forks<br>b x h<br>mm |
|----------|----------------------|
| PZV 16-G | 100x45               |
| PZV 20-G | 100x50               |
| PZV 25-G | 120x50               |
| PZV 28-G | 125x50               |
| PZV 30-G | 125x50               |

**DURWEN**  
Forklift Attachments

More than 75 years experience