


Sideshifting fork positioner

PZV-G
ISO IV

integral sideshift, bolt-on forks

The **sideshifting fork positioner PZV-G** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. The integral sideshift depends on the actual fork position.

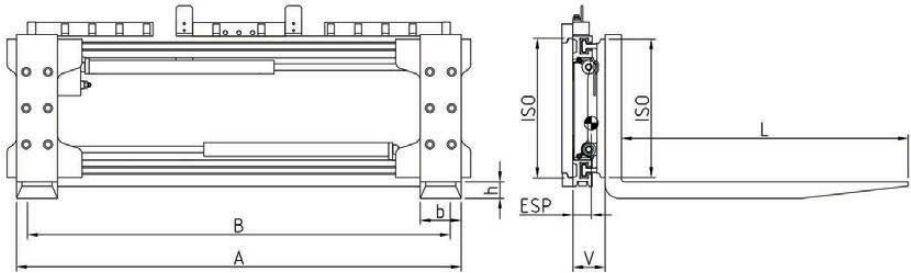

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	forks mm	V LLC mm	ESP COG mm	weight kg
PZV 50-G	5000/600	5,0/600	IV	490-1330	1250	150x70x1200	135	290	570
				490-1430	1350			285	580
				490-1530	1450			280	590
PZV 60-G	6000/600	6,0/600	IV	560-1560	1460	150x70x1200	143	270	740
				560-1960	1860			250	820
PZV 80-G	8000/600	7,0-8,0/600	IV	560-1900	1800	200x70x1200	143	285	930
				560-1960	1860			280	940
				560-2160	2060			270	960
				560-2360	2260			260	980
				560-2500	2400			250	1010
PZV 100-G	8000/900	8,0/900	IV	560-2160	2060	200x80x1200	171	270	1120
				560-2360	2260			260	1160
				560-2500	2400			250	1190
PZV 110-G	8000/1100	8,0/1100	IV	560-2160	2060	200x80x1200	171	270	1120
				560-2360	2260			260	1160
				560-2500	2400			250	1190

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed