


Sideshifting fork positioner

PZV-IG
ISO III

integrated, integral sideshift, bolt-on forks

The fork positioner **PZV-IG** uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. An integral sideshift depends on the actual fork position. Also prepared for the use of standard forks according to ISO 2328. Bolt-on forks are included.

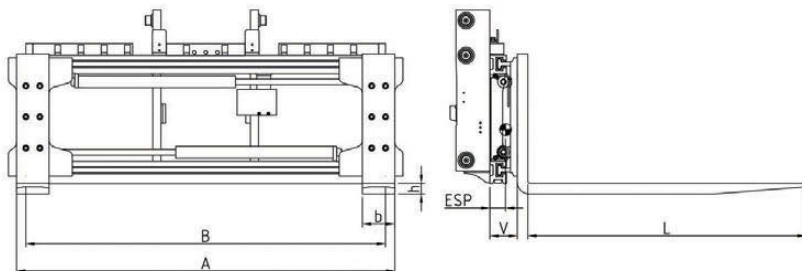

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PZV 30-IG*	3000/500	3,0/500	III	1040 1150 1200 1250 1350	490-1120 490-1230 490-1280 490-1330 490-1430	125x45x1200	113	255 250 245 240 230	312 320 325 330 340
PZV 35-IG	3500/500	3,0/600- 3,5/500	III	1040 1150 1200 1250 1350	490-1120 490-1230 490-1280 490-1330 490-1430	140x50x1200	113	280 275 270 265 255	347 355 360 365 375
PZV 45-IG	5000/500	3,5/600- 5,0/500	III	1150 1250 1300 1310 1350 1450	490-1230 490-1330 490-1380 490-1390 490-1430 490-1530	150x60x1200	120	300 290 285 282 280 270	444 454 459 460 465 475
PZV 48-IG	5000/600	5,0/600	III	1310 1350	490-1390 490-1430	150x60x1200	120	278 275	465 475

- 2 hydraulic functions required
- without hoses and couplings
- includes integral sideshift, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
PZV 30-IG	125x50