


Fork positioner

PZV-IG
ISO II

integrated, integral sideshift, bolt-on forks

The fork positioner PZV-IG uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. An integral sideshift depends on the actual fork position. Also prepared for the use of standard forks according to ISO 2328. Bolt-on forks are included.

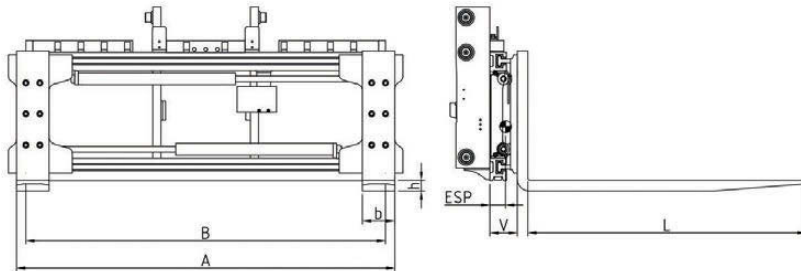

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PZV 16-IG*	1600/500	1,0-1,5/500	II	850	470-910	100x40x1200	114	240	270
				980	470-1040			230	260
				1040	470-1100			225	255
PZV 20-IG*	2000/500	1,8-2,0/500	II	850	470-910	100x45x1200	114	250	249
				980	470-1040			240	259
				1040	470-1100			235	264
				1150	470-1210			230	272
PZV 25-IG*	2500/500	2,0/600- 2,5/500	II	980	490-1060	120x40x1200	114	255	284
				1040	490-1120			245	287
				1100	490-1180			240	291
				1150	490-1230			235	296
PZV 28-IG*	2500/600	2,5/600	II	1040	495-1125	125x45x1200	114	255	294
				1100	495-1185			250	298
				1150	495-1235			245	304

- 2 hydraulic functions required
- without hoses and couplings
- includes integral sideshift, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

***Forks longer 1600 mm
cross section changes**

type	forks b x h mm
PZV 16-IG	100x45
PZV 20-IG	100x50
PZV 25-IG	120x50
PZV 28-IG	125x50