


Fork positioner

PZV-IG
ISO IV

integrated, integral sideshift, bolt-on forks

The fork positioner **PZV-IG** uses T-profiles to adjust the forks. The compact design offers reliability and excellent visibility for the driver. An integral sideshift depends on the actual fork position. Also prepared for the use of standard forks according to ISO 2328. Bolt-on forks are included.

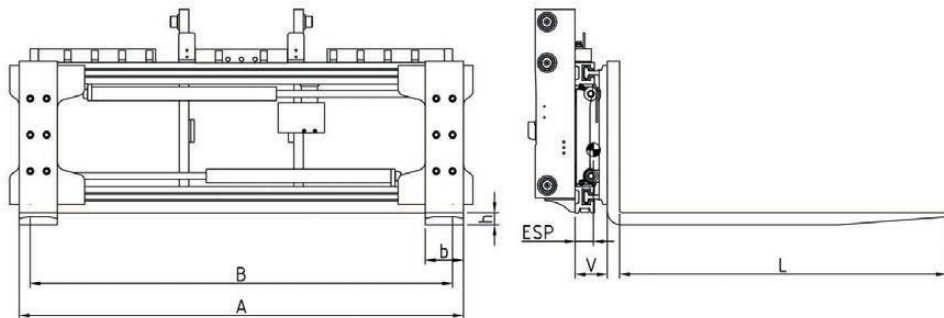

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
PZV 50-IG	5000/600	5,0/600	IV	1250	490-1330	150x70x1200	135	290	570
				1350	490-1430			285	580
				1450	490-1530			280	590
PZV 60-IG	6000/600	6,0/600	IV	1460	560-1560	150x70x1200	143	270	740
				1860	560-1960			250	820
PZV 80-IG	8000/600	7,0-8,0/600	IV	1800	560-1900	200x70x1200	143	285	930
				1860	560-1960			280	940
				2060	560-2160			270	960
				2260	560-2360			260	980
				2400	560-2500			250	1010
PZV 100-IG	8000/900	8,0/900	IV	2060	560-2160	200x80x1200	171	270	1120
				2260	560-2360			260	1160
				2400	560-2500			250	1190
PZV 110-IG	8000/1100	8,0/1100	IV	2060	560-2160	200x80x1200	171	270	1120
				2260	560-2360			260	1160
				2400	560-2500			250	1190

- 2 hydraulic functions required
- without hoses and couplings
- includes integral sideshift, depending on opening range
- bolt-on forks as standard
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed