


Sideshifting fork positioner

PZV
ISO II/III

integral sideshift, no forks

The **sideshifting fork positioner PZV** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is not available with forks fully open or fully closed.

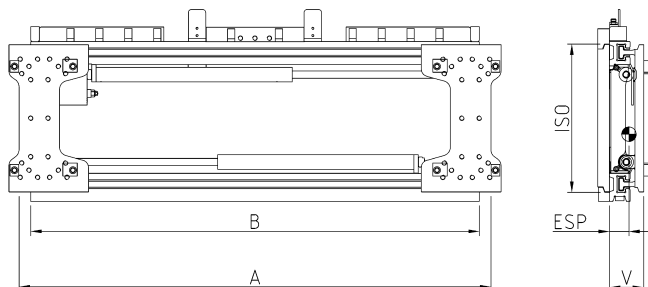

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	to suit fork width mm	V LLC mm	ESP COG mm	weight kg
PZV 25	2500/500	1,5-2,5/500	II	490-1060	980	80-150	105	55	150
				490-1120	1040			50	155
				490-1180	1100			48	160
				490-1230	1150			40	165
PZV 28	2500/600	2,5/600	II	490-1120	1040	80-150	105	50	155
				490-1180	1100			48	160
				490-1230	1150			40	165
PZV 30	3000/500	3,0/500	III	490-1120	1040	100-150	113	60	177
				490-1230	1150			55	182
				490-1280	1200			45	187
				490-1330	1250			40	192
				490-1430	1350			35	202
PZV 35	3500/500	3,0/600-3,5/500	III	490-1120	1040	120-150	113	60	177
				490-1230	1150			55	182
				490-1280	1200			45	187
				490-1330	1250			40	192
				490-1430	1350			35	202
PZV 45	5000/500	3,5/600-5,0/500	III	490-1230	1150	120-150	120	66	212
				490-1330	1250			56	222
				490-1380	1300			51	227
				490-1390	1310			50	228
				490-1430	1350			45	232
				490-1530	1450			40	242
PZV 48	5000/600	5,0/600	III	490-1390	1310	120-150	120	45	231
				490-1430	1350			42	235

- 2 hydraulic functions required
- includes hoses and couplings
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- if no sideshift required indicate on your order
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask

- PZV 20-50 allow min. fork position 80 mm inside, PZV 60-110 allow min. fork position 160 mm inside
- clamping of goods not allowed