


Sideshifting fork positioner

**PZV
ISO IV**

integral sideshift, no forks

The **sideshifting fork positioner PZV** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is not available with forks fully open or fully closed.

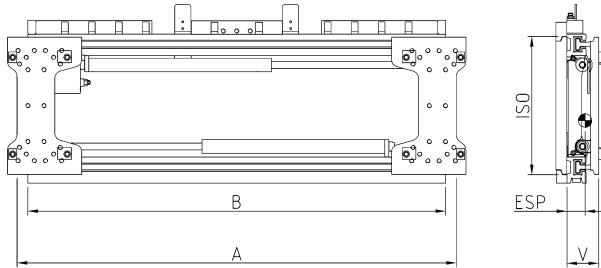

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	to suit fork width mm	V LLC mm	ESP COG mm	weight kg
PZV 50	5000/600	5,0/600	IV	490-1330	1250	130-150	135	55	270
				490-1430	1350			50	280
				490-1530	1450			45	290
PZV 60	6000/600	6,0/600	IV	560-1560	1460	130-200	143	75	405
				560-1960	1860			65	465
PZV 80	8000/600	7,0-8,0/600	IV	560-1900	1800	150-200	143	73	470
				560-1960	1860			70	485
				560-2160	2060			65	525
				560-2360	2260			60	565
				560-2500	2400			55	595
PZV 100	8000/900	8,0/900	IV	560-2160	2060	150-200	171	83	665
				560-2360	2260			80	705
				560-2500	2400			75	735
PZV 110	8000/1100	8,0/1100	IV	560-2160	2060	150-200	171	83	665
				560-2360	2260			80	705
				560-2500	2400			75	735

- 2 hydraulic functions required
- includes hoses and couplings
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- if no sideshift required indicate on your order
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- PZV 20-50 allow min. fork position 80 mm inside, PZV 60-110 allow min. fork position 160 mm inside
- clamping of goods not allowed