


Sideshifting fork positioner

PZV-S
ISO II/III

constant sideshift, no forks

The **sideshifting fork positioner PZV-S** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

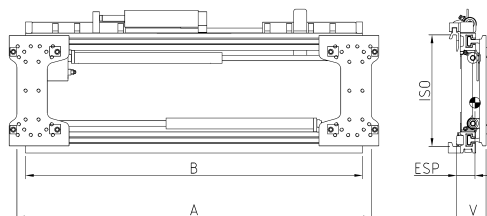

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	sideshift mm	to suit fork width mm	V LLC mm	ESP COG mm	weight kg
PZV 20-S	2000/500	1,0-2,0/500	II	490-1060	980	+/- 100	80-150	122	55	161
				490-1120	1040				52	166
				490-1230	1150				45	176
PZV 25-S	2500/500	2,0-2,5/500	II	490-1060	980	+/- 100	80-150	122	55	161
				490-1120	1040				52	166
				490-1180	1100				50	171
				490-1230	1150				45	176
PZV 28-S	2500/600	2,5/600	II	490-1120	1040	+/- 100	80-150	122	52	166
				490-1180	1100				49	171
				490-1230	1150				45	176
PZV 30-S	3000/500	3,0/500	III	490-1120	1040	+/- 100	100-150	129	55	180
				490-1230	1150				50	190
				490-1280	1200				48	195
				490-1330	1250				45	200
				490-1430	1350				40	210
PZV 35-S	3500/500	3,0/600- 3,5/500	III	490-1120	1040	+/- 100	120-150	129	55	180
				490-1230	1150				50	190
				490-1280	1200				48	195
				490-1330	1250				45	200
				490-1430	1350				40	210
PZV 45-S	5000/500	3,5/600- 5,0/500	III	490-1230	1150	+/- 100	120-150	136	65	240
				490-1280	1200				64	242
				490-1330	1250				63	244
				490-1380	1300				62	248
				490-1390	1310				61	249
				490-1430	1350				60	252
				490-1530	1450				58	258
PZV 48-S	5000/600	5,0/600	III	490-1390	1310	+/- 100	120-150	136	60	252
				490-1430	1350				55	256

- 2 hydraulic functions required
- includes hoses and couplings
- for hook-on forks ISO 2328

- bolt-on forks can be used
- forks not included
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask

- PZV 20-50 allow min. fork position 80 mm inside, PZV 60-110 allow min. fork position 160 mm inside
- clamping of goods not allowed



image shows optional
hook-on forks