


Sideshifting fork positioner

PZV-S
ISO IV

constant sideshift, no forks

The **sideshifting fork positioner PZV-S** uses T profile guides for positioning of forks. Compact design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

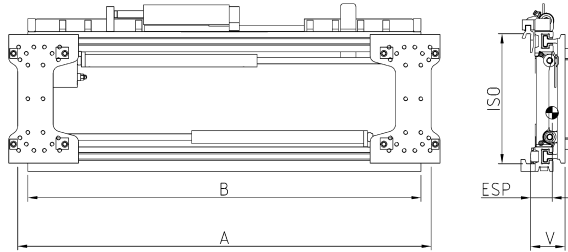

type	capacity kg/mm LC	lift truck capacity to	ISO	A mm	B mm	sideshift mm	to suit fork width mm	V LLC mm	ESP COG mm	weight kg
PZV 50-S	5000/600	5,0/600	IV	490-1330	1250	+/- 100	130-150	158	65	310
				490-1430	1350				61	320
				490-1530	1450				58	330
PZV 60-S	6000/600	6,0/600	IV	560-1560	1460	+/- 100 +/-160	130-200	166	70	465
				560-1960	1860				65	545
PZV 80-S	8000/600	7,0-8,0/600	IV	560-1900	1800	+/-160	150-200	166	68	553
				560-1960	1860				65	565
				560-2160	2060				60	585
				560-2360	2260				55	605
				560-2500	2400				50	633
PZV 100-S	8000/900	8,0/900	IV	560-2160	2060	+/-160	150-200	194	78	725
				560-2360	2260				75	765
				560-2500	2400				70	795
PZV 110-S	8000/1100	8,0/1100	IV	560-2160	2060	+/-160	150-200	194	78	725
				560-2360	2260				75	765
				560-2500	2400				70	795

- 2 hydraulic functions required
- includes hoses and couplings
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- PZV 20-50 allow min. fork position 80 mm inside, PZV 60-110 allow min. fork position 160 mm inside
- clamping of goods not allowed

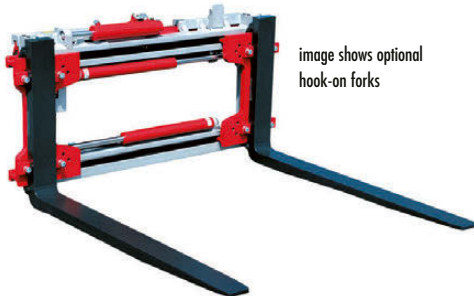


image shows optional
hook-on forks