


Fork positioner

PZV-S-TGZ
ISO III

telescopic forks, constant sideshift

The sideshifting fork positioner PZV-S-TGZ uses T profile guides. Compact design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position. The combined telescopic forks support faster and safer work due to ideal support of the transported goods. Single side loading is enabled as well. The forks are positioned hydraulically in your daily operation, however the pre-set position of the forks on the carrier can be changed due to the bolted fork stops. Under the table you find the minimum pre-set position available inside to inside fork shanks.

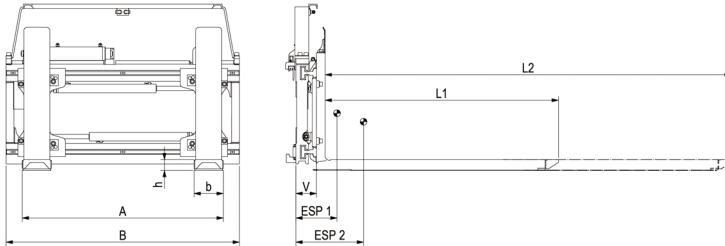

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	ESP/COG 1/2 mm	weight kg
PZV-S-TGZ.35.1200	3500/500	1630/1450	3,0/500- 3,5/500	III	1040 1150	500-1130 500-1240	1200/2050	161x57	150x45	+/- 100	129	325/442 318/434	412 422
PZV-S-TGZ.35.1350	3500/500	1390/1750	3,0/500- 3,5/500	III	1040 1150	500-1130 500-1240	1350/2350	161x57	150x45	+/- 100	129	369/515 361/504	426 436
PZV-S-TGZ.40.1200	4000/500	1850/1450	3,5/600- 4,0/500	III	1150 1350	500-1240 500-1440	1200/2050	161x57	150x45	+/- 100	136	306/415 295/399	460 480
PZV-S-TGZ.40.1350	4000/500	1550/1750	3,5/600- 4,0/500	III	1150 1350	500-1240 500-1440	1350/2350	161x57	150x45	+/- 100	136	349/484 336/466	476 496
PZV-S-TGZ.48.1200 PZV-S-TGZ.48.1350	5000/600	2300/1450 1900/1750	4,5/500- 5,0/600	III	1350	500-1440	1200/2050 1350/2350	161x62	150x50	+/- 100	136	305/407 343/469	501 515

- 3 hydraulic functions required
- includes hoses and couplings
- hook-on TGZ ISO 2328 as standard
- bolt-on forks upon request (drilling pattern change, please ask)
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork tip made of solid steel to reduce service costs

- thicker mangan steel wear zone (+6 mm) ISO III upon request
- pallet stop ISO III (see page 198) upon request:
 - A) 75 mm on the fork pocket sides
 - B) 400 mm
 - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting upon request ISO III
- PZV-S-TGZ 35-48 allow min. fork position 69 mm inside



DURWEN
Forklift Attachments

More than 75 years experience

PP002024