


# Fork positioner

**PZV-S-TGZ**  
**ISO II**

telescopic forks, constant sideshift

The **sideshifting fork positioner PZV-S-TGZ** uses T profile guides. Compact design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position. The combined telescopic forks support faster and safer work due to ideal support of the transported goods. Single side loading is enabled as well. The forks are positioned hydraulically in your daily operation, however the pre-set position of the forks on the carrier can be changed due to the bolted fork stops. Under the table you find the minimum pre-set position available inside to inside fork shanks.

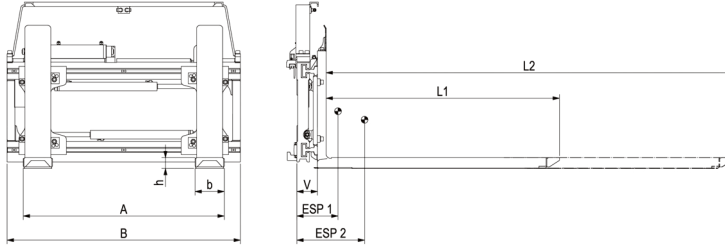

type	capacity kg/ LC 1 mm	capacity kg/ LC 2 mm	lift truck to/ LC mm	ISO	B mm	A mm	retracted extended L1/L2 mm	fork b x h mm	fork back mm	sideshift mm	V LLC mm	ESP/COG 1/2 mm	weight kg
PZV-S-TGZ.20.1200	2000/500	950/1450	1,0/500-	II	1040	480-1110	1200/2050 1350/2350	131x57	120x45	+/- 100	122	293/383 366/503	349
PZV-S-TGZ.20.1350			2,0/500										365
PZV-S-TGZ.22.1200	2000/500	950/1450	1,0/500-	II	1040	500-1130 500-1240	1200/2050 1350/2350	161x57	150x45	+/- 100	122	340/464 329/454	386
PZV-S-TGZ.22.1200			2,0/500										396
PZV-S-TGZ.22.1350	2000/500	810/1750	1,0/500-	II	1040	500-1130 500-1240	1200/2050 1350/2350	161x57	150x45	+/- 100	122	384/535 376/527	396
PZV-S-TGZ.22.1350			2,0/500										406
PZV-S-TGZ.25.1200	2500/600	1200/1450	2,0/600-	II	1040	500-1130 500-1240	1200/2050 1350/2350	161x57	150x45	+/- 100	122	337/464 329/454	388
PZV-S-TGZ.25.1200			2,5/600										398
PZV-S-TGZ.25.1350	2500/600	1000/1750	2,0/600-	II	1040	500-1130 500-1240	1350/2350	161x57	150x45	+/- 100	122	384/539 376/527	398
PZV-S-TGZ.25.1350			2,5/600										408

- 3 hydraulic functions required
- includes hoses and couplings
- hook-on TGZ ISO 2328 as standard
- bolt-on forks upon request  
(drilling pattern change, please ask)
- protection strip with integrated hose guide as standard
- standard with easily replaceable wear zones and fork  
tip made of solid steel to reduce service costs
- thicker mangan steel wear zone (+6 mm) ISO II upon request
- pallet stop ISO II (see page 198) upon request:
  - A) 75 mm on the fork pocket sides
  - B) 400 mm
  - C) 850 mm
- type B and C reduce the useable length by 50 mm
- different pallet stop positions upon request
- solenoid valve upon request (12 V, 24 V, 48 V, 80 V - please specify)
- for ISO type B mounting upon request ISO II/III
- PZV-S-TGZ 25-48 allow min. fork position 69 mm inside



**DURWEN**  
Forklift Attachments

More than 75 years experience

PL 01-2024