


Sideshifting fork positioner

constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.


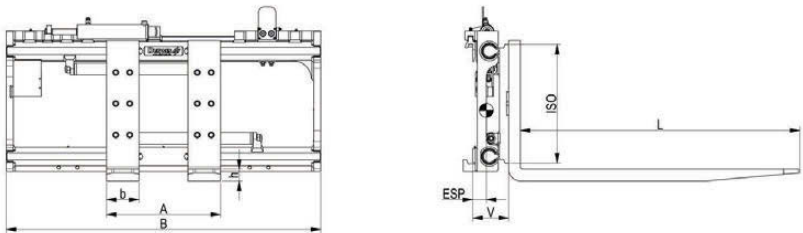


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg			
RZV 30-GS*	3000/500	3,0/500	III	1040 1100 1150 1200 1350	495-1125 495-1185 495-1235 495-1285 495-1435	125x45x1200	+/- 100	152	210 207 205 204 203	313 320 326 329 340			
RZV 35-GS	3500/500	3,0/600- 3,5/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140x50x1200			152	224 222 221 218	362 368 372 383		
RZV 40-GS	4000/500	3,5/600- 4,0/500		1150 1350 1550 1750* 2000**	490-1230 490-1430 490-1630 490-1830 490-2080	140x50x1200				168	228 225 220 215 210	415 430 445 460 495	
RZV 45-GS	5000/600	4,0-5/600		1150 1200 1250 1300 1350 1450 1550 1750* 2000**	500-1240 500-1290 500-1340 500-1390 500-1440 500-1540 500-1640 500-1840 500-2090	150x60x1200					168	228 227 226 226 225 222 220 215 210	465 468 472 476 480 488 495 510 550

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request

- for forks up to 2400 mm, longer please ask
 - clamping of goods not allowed
- * minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

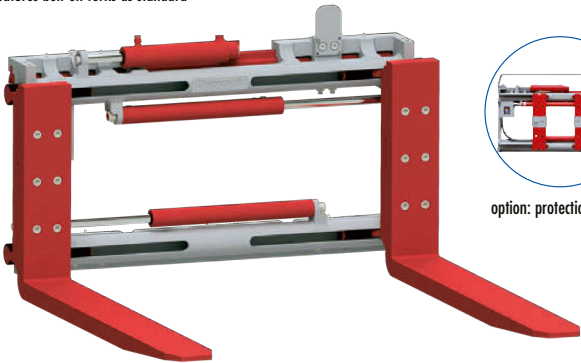

option: protection strip

*Forks longer 1600 mm cross section changes	
type	forks b x h mm
RZV 30-GS	125x50