
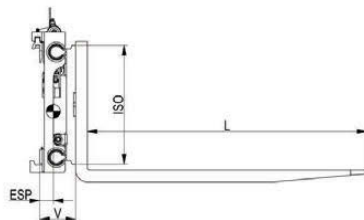


Sideshifting fork positioner

RZV-GS
ISO II



constant sideshift, bolt-on forks

The **sideshifting fork positioner RZV-GS** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The constant sideshift operates at any fork position.



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 16-GS*	1600/500	1,0-1,6/500	II	850 980 1040	470-910 470-1040 470-1100	100x40x1200	+/- 75 +/- 100 +/- 100	142	229 228 224	241 246 254
RZV 20-GS*	2000/500	1,8-2,0/500		850 980 1040 1100 1150	470-910 470-1040 470-1100 470-1160 470-1210	100x45x1200	+/- 75 +/- 100 +/- 100 +/- 100 +/- 100		225 222 221 221 218	246 250 258 262 268
RZV 25-GS*	2500/500	2,5/500		980 1000 1040 1100 1150 1200 1350	490-1060 490-1080 490-1120 490-1180 490-1230 490-1280 490-1430	120x40x1200	+/- 100		220 218 218 218 215 215 213	255 261 263 267 272 275 282
RZV 28-GS*	2500/600	2,5/600		1040 1150 1350	495-1125 495-1235 495-1435	125x45x1200	+/- 100		220 218 215	273 278 288

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- features bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

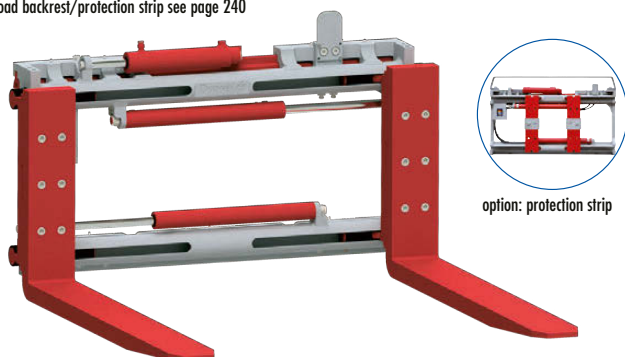

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 16-GS	100x50
RZV 20-GS	100x50
RZV 25-GS	120x50
RZV 28-GS	125x50

DURWEN
Forklift Attachments

More than 75 years experience