


# Fork positioner

**RZV-GS-SF-S-L**  
**RZV-GS-SF-F-L-SE**

constant sideshift, bolt-on forks

The **fork positioner RZV-GS** has a stable round bar guide in which the carrier with bolt-on forks is positioned. Constant sideshift enables sideshifting completely at every fork position. Use of standard forks according to ISO 2328 is also possible.

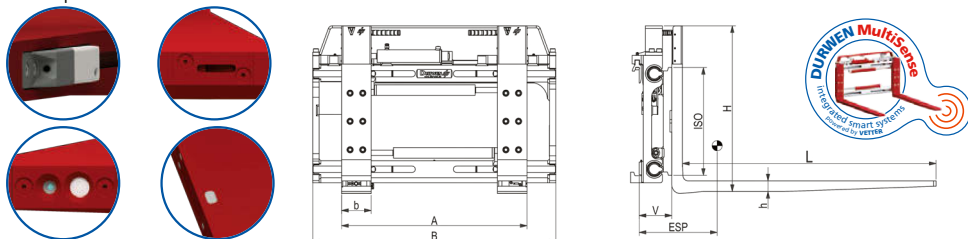

## SideCam + Laser

| type              | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm | A<br>mm  | forks<br>b x h x L<br>mm | sideshift<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|-------------------|-------------------------|---------------------------|-----|---------|----------|--------------------------|-----------------|----------------|------------------|--------------|
| RZV 16-GS-SF-S-L* | 1600/500                | 1,0-1,6/500               | II  | 980     | 470-1040 | 100x40x1200              | +/- 100         | 142            | 228              | 246          |
| RZV 20-GS-SF-S-L* | 2000/500                | 1,8-2,0/500               | II  | 1040    | 470-1100 | 100x45x1200              | +/- 100         | 142            | 221              | 258          |
| RZV 25-GS-SF-S-L* | 2500/500                | 2,5/500                   | II  | 1150    | 490-1230 | 120x40x1200              | +/- 100         | 142            | 215              | 272          |
| RZV 28-GS-SF-S-L* | 2500/600                | 2,5/600                   | II  | 1150    | 495-1235 | 125x45x1200              | +/- 100         | 142            | 218              | 278          |
| RZV 30-GS-SF-S-L* | 3000/500                | 3,0/500                   | III | 1150    | 495-1235 | 125x45x1200              | +/- 100         | 152            | 205              | 326          |
| RZV 35-GS-SF-S-L  | 3500/500                | 3,0/600-<br>3,5/500       | III | 1150    | 490-1230 | 140x50x1200              | +/- 100         | 152            | 222              | 368          |
| RZV 40-GS-SF-S-L  | 4000/500                | 3,5/600-<br>4,0/500       | III | 1350    | 490-1430 | 140x50x1200              | +/- 100         | 168            | 225              | 430          |
| RZV 45-GS-SF-S-L  | 5000/600                | 4,0-5/600                 | III | 1350    | 500-1440 | 150x60x1200              | +/- 100         | 168            | 225              | 480          |

## FrontCam + Laser + Secure

| type                 | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm | A<br>mm  | forks<br>b x h x L<br>mm | sideshift<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|----------------------|-------------------------|---------------------------|-----|---------|----------|--------------------------|-----------------|----------------|------------------|--------------|
| RZV 16-GS-SF-F-L-SE* | 1600/500                | 1,0-1,6/500               | II  | 980     | 470-1040 | 100x40x1200              | +/- 100         | 142            | 228              | 246          |
| RZV 20-GS-SF-F-L-SE* | 2000/500                | 1,8-2,0/500               | II  | 1040    | 470-1100 | 100x45x1200              | +/- 100         | 142            | 221              | 258          |
| RZV 25-GS-SF-F-L-SE* | 2500/500                | 2,5/500                   | II  | 1150    | 490-1230 | 120x40x1200              | +/- 100         | 142            | 215              | 272          |
| RZV 28-GS-SF-F-L-SE* | 2500/600                | 2,5/600                   | II  | 1150    | 495-1235 | 125x45x1200              | +/- 100         | 142            | 218              | 278          |
| RZV 30-GS-SF-F-L-SE* | 3000/500                | 3,0/500                   | III | 1150    | 495-1235 | 125x45x1200              | +/- 100         | 152            | 205              | 326          |
| RZV 35-GS-SF-F-L-SE  | 3500/500                | 3,0/600-<br>3,5/500       | III | 1150    | 490-1230 | 140x50x1200              | +/- 100         | 152            | 222              | 368          |
| RZV 40-GS-SF-F-L-SE  | 4000/500                | 3,5/600-<br>4,0/500       | III | 1350    | 490-1430 | 140x50x1200              | +/- 100         | 168            | 225              | 430          |
| RZV 45-GS-SF-F-L-SE  | 5000/600                | 4,0-5/600                 | III | 1350    | 500-1440 | 150x60x1200              | +/- 100         | 168            | 225              | 480          |

- 2 hydraulic functions required
- includes hoses and couplings
- includes 5-pin M12 transfer connector
- constant sideshift as standard
- features bolt-on forks as standard
- plug and play connection as standard
- 12/24 Volt system

- protection strip with integrated hose guide as standard
- suitable for longer forks
- clamping of goods not allowed
- accessories see page 197

\*for forks longer than 1600 mm the cross section might change, please ask

**DURWEN**  
Forklift Attachments

More than 75 years experience