


Fork positioner

RZV-GS-SF-L
RZV-GS-SF-F-L

constant sideshift, bolt-on forks

The fork positioner **RZV-GS** has a stable round bar guide in which the carrier with bolt-on forks is positioned. Constant sideshift enables sideshifting completely at every fork position. Use of standard forks according to ISO 2328 is also possible.

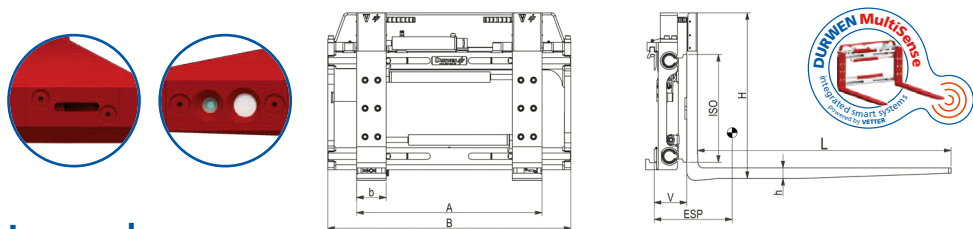

Laser only

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 16-GS-SF-L*	1600/500	1,0-1,6/500	II	980	470-1040	100x40x1200	+/- 100	142	228	246
RZV 20-GS-SF-L*	2000/500	1,8-2,0/500	II	1040	470-1100	100x45x1200	+/- 100	142	221	258
RZV 25-GS-SF-L*	2500/500	2,5/500	II	1150	490-1230	120x40x1200	+/- 100	142	215	272
RZV 28-GS-SF-L*	2500/600	2,5/600	II	1150	495-1235	125x45x1200	+/- 100	142	218	278
RZV 30-GS-SF-L*	3000/500	3,0/500	III	1150	495-1235	125x45x1200	+/- 100	152	205	326
RZV 35-GS-SF-L	3500/500	3,0/600- 3,5/500	III	1150	490-1230	140x50x1200	+/- 100	152	222	368
RZV 40-GS-SF-L	4000/500	3,5/600- 4,0/500	III	1350	490-1430	140x50x1200	+/- 100	168	225	430
RZV 45-GS-SF-L	5000/600	4,0-5/600	III	1350	500-1440	150x60x1200	+/- 100	168	225	480

FrontCam + Laser

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 16-GS-SF-F-L*	1600/500	1,0-1,6/500	II	980	470-1040	100x40x1200	+/- 100	142	228	246
RZV 20-GS-SF-F-L*	2000/500	1,8-2,0/500	II	1040	470-1100	100x45x1200	+/- 100	142	221	258
RZV 25-GS-SF-F-L*	2500/500	2,5/500	II	1150	490-1230	120x40x1200	+/- 100	142	215	272
RZV 28-GS-SF-F-L*	2500/600	2,5/600	II	1150	495-1235	125x45x1200	+/- 100	142	218	278
RZV 30-GS-SF-F-L*	3000/500	3,0/500	III	1150	495-1235	125x45x1200	+/- 100	152	205	326
RZV 35-GS-SF-F-L	3500/500	3,0/600- 3,5/500	III	1150	490-1230	140x50x1200	+/- 100	152	222	368
RZV 40-GS-SF-F-L	4000/500	3,5/600- 4,0/500	III	1350	490-1430	140x50x1200	+/- 100	168	225	430
RZV 45-GS-SF-F-L	5000/600	4,0-5/600	III	1350	500-1440	150x60x1200	+/- 100	168	225	480

- 2 hydraulic functions required
- includes hoses and couplings
- includes 5-pin M12 transfer connector
- constant sideshift as standard
- features bolt-on forks as standard
- plug and play connection as standard
- 12/24 Volt system

- protection strip with integrated hose guide as standard
- suitable for longer forks
- clamping of goods not allowed
- accessories see page 197

*for forks longer than 1600 mm the cross section might change, please ask

DURWEN
Forklift Attachments

More than 75 years experience