
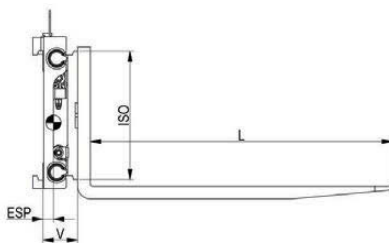


Sideshifting fork positioner

RZV-G
ISO III

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.


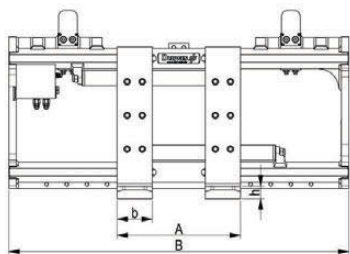


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 30-G*	3000/500	3,0/500	III	1040	495-1125	125x45x1200	138	210	290
				1100	495-1185			208	297
				1150	495-1235			205	305
				1200	495-1285			204	312
				1350	495-1435			203	320
RZV 35-G	3500/500	3,0/600- 3,5/500		1100	490-1180	140x50x1200	138	224	341
				1150	490-1230			222	345
				1200	490-1280			221	349
				1350	490-1430			218	360
RZV 40-G	4000/500	3,5/600- 4,0/500		1150	490-1230	140x50x1200	153	228	388
				1350	490-1430			225	400
				1550	490-1630			220	415
				1750*	490-1830			215	430
				2000**	490-2080			210	480
RZV 45-G	5000/600	4,0-5,0/600		1150	500-1240	150x60x1200	153	228	435
				1200	500-1290			227	439
				1250	500-1340			226	443
				1300	500-1390			226	447
				1350	500-1440			225	450
				1450	500-1540			223	458
				1550	500-1640			220	465
				1750*	500-1840			215	480
				2000**	500-2090			210	530

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- features bolt-on forks as standard

- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm

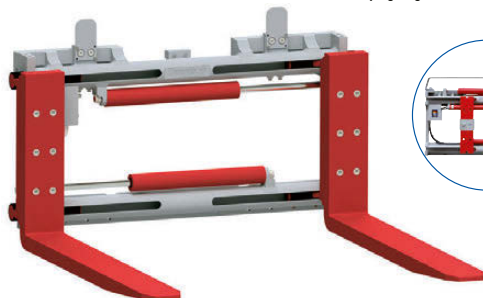

option: protection strip

*Forks longer 1600 mm
cross section changes

type	forks b x h mm
RZV 30-G	125x50

DURWEN
Forklift Attachments

More than 75 years experience