


Sideshifting fork positioner

integral sideshift, bolt-on forks

The **sideshifting fork positioner RZV-G** uses stable round bar guides for fork positioning. The simple design offers reliability and excellent operator visibility. The valve sideshift is depending on fork position.


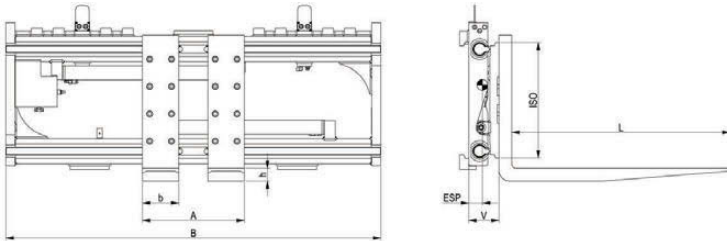


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 50-G	5000/600	5,0/600	IV	1250 1350 1450 1550	500-1340 500-1440 500-1540 500-1640	150x70x1200	163	300 295 290 285	588 601 614 627
RZV 60-G	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150x70x1200	165	186 185 184 183 180	730 745 770 780 810
RZV 70-G	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150x70x1200	165	188 183 180	765 845 885
RZV 80-G	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200x70x1200	165	195 189 189 187 186 185 183 179	790 875 890 920 930 955 980 1030
RZV 100-G	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200x80x1200	190	180 178 175 172	1120 1150 1180 1210
RZV 110-G	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200x80x1200	192	190 185 182	1185 1242 1272

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range

- features bolt-on forks as standard
- for hook-on forks ISO 2328
- load backrest/protection strip see page 240
- quick release hooks (ISO IV) upon request

- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

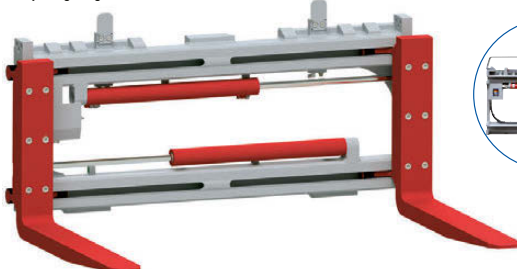

option: protection strip