


## Fork positioner

integrated, integral sideshift, bolt-on forks

**The fork positioner RZV-IG** with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard ISO 2328 forks can also be used and the fork length can be up to 2400 mm. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. Delivery incl. brackets, stubshafts and chain anchors.

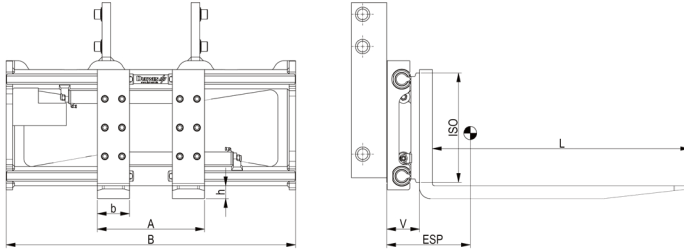



| type       | capacity<br>kg<br>LC mm | lift truck<br>to<br>LC mm | ISO | B<br>mm | A<br>mm  | forks<br>b x h x L<br>mm | V<br>LLC<br>mm | ESP<br>COG<br>mm | weight<br>kg |
|------------|-------------------------|---------------------------|-----|---------|----------|--------------------------|----------------|------------------|--------------|
| RZV 30-IG* | 3000/500                | 3,0/500                   | III | 1040    | 495-1125 | 125x45x1200              | 138            | 273              | 300          |
|            |                         |                           |     | 1150    | 495-1235 |                          |                | 270              | 310          |
|            |                         |                           |     | 1350    | 495-1435 |                          |                | 265              | 325          |
| RZV 35-IG  | 3500/500                | 3,0/600-<br>3,5/500       |     | 1150    | 490-1230 | 140x50x1200              | 138            | 295              | 350          |
|            |                         |                           |     | 1350    | 490-1430 |                          |                | 285              | 365          |
|            |                         |                           |     |         |          |                          |                |                  |              |
| RZV 40-IG  | 4000/500                | 3,5/600-<br>4,0/500       |     | 1150    | 490-1230 | 140x50x1200              | 153            | 270              | 410          |
|            |                         |                           |     | 1350    | 490-1430 |                          |                | 260              | 430          |
|            |                         |                           |     | 1550    | 490-1630 |                          |                | 250              | 450          |
|            |                         |                           |     | 1750    | 490-1830 |                          |                | 240              | 520          |
|            |                         |                           |     | 2000    | 490-2080 |                          |                | 230              | 535          |
| RZV 45-IG  | 5000/500                | 4,0/600-<br>5,0/500       |     | 1150    | 500-1240 | 150x60x1200              | 153            | 300              | 455          |
|            |                         |                           |     | 1350    | 500-1440 |                          |                | 290              | 478          |
|            |                         |                           |     | 1550    | 500-1640 |                          |                | 280              | 495          |
|            |                         |                           |     | 1750    | 500-1840 |                          |                | 270              | 515          |
|            |                         |                           |     | 2000    | 500-2090 |                          |                | 260              | 565          |
| RZV 48-IG  | 5000/600                | 5,0/600                   |     | 1150    | 500-1240 | 150x60x1200              | 153            | 300              | 460          |
|            |                         |                           |     | 1350    | 500-1440 |                          |                | 290              | 490          |
|            |                         |                           |     | 1550    | 500-1640 |                          |                | 280              | 505          |
|            |                         |                           |     | 1750    | 500-1840 |                          |                | 270              | 520          |
|            |                         |                           |     | 2000    | 500-2090 |                          |                | 260              | 570          |

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- including brackets, chain anchor and stub shafts, without rollers

- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details
- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

**\*Forks longer 1600 mm  
cross section changes**

| type      | forks<br>b x h<br>mm |
|-----------|----------------------|
| RZV 30-IG | 125x50               |

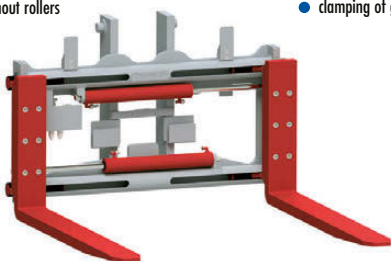

option: protection strip