


Fork positioners for heavy forklift trucks

integrated, integral sideshift, bolt-on forks

The **fork positioner type RZV-IG** with bolt-on forks has stable round bar guides in which the two mounting plates with forks are moved. Sideshift by valve allows sideshift depending on the opening range (A). At the end positions, sideshift is not possible. Excellent visibility makes safe working possible. Euro pallets can be picked up lengthwise with units up to 200 mm fork width.

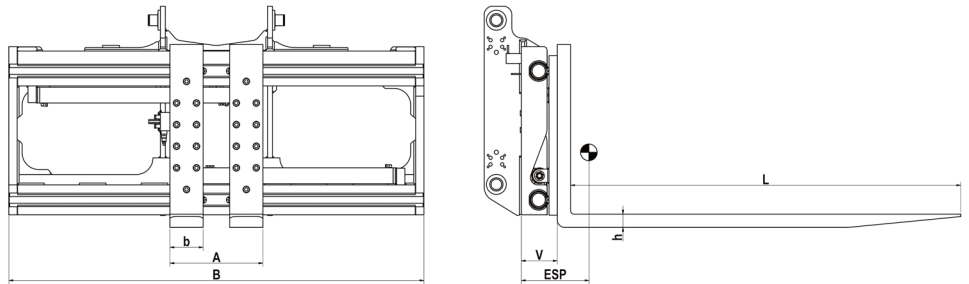

type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	forks b x h x L mm	V LLC mm	ESP COG mm	weight kg
RZV 95-IG	10000/600	10,0/600	integrated	2400	560-2500	200x80x2400	217	401	2085
RZV 105-IG	10000/900	10,0/900			560-2500	200x85x2400	217	503	2235
RZV 120-IG	12000/600	12,0/600			560-2500	200x80x2400	217	433	2180
RZV 130-IG	12000/1200	12,0/1200			560-2600	250x90x2400	285	525	2620
RZV 140-IG	14000/600	14,0/600			560-2500	200x90x2400	265	450	2315
RZV 150-IG	14000/1200	14,0/1200			560-2600	250x90x2400	285	525	2620
RZV 160-IG	16000/600	16,0/600			560-2500	200x90x2400	265	480	2385
RZV 180-IG	18000/600	18,0/600			560-2600	250x90x2400	285	525	2620
RZV 190-IG	16000/1200	16,0/1200			560-2600	250x100x2400	285	555	2750

- 2 hydraulic functions required
- without hoses and couplings
- features bolt-on forks as standard
- sideshift via valve, dependent on opening range
- weight does not include brackets
- COG from front face of brackets
- LLC (V) from front face of brackets plus fork thickness
- clamping of goods is not allowed

