


Sideshifting fork positioner

**RZV
ISO III**

integral sideshift, no forks

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.

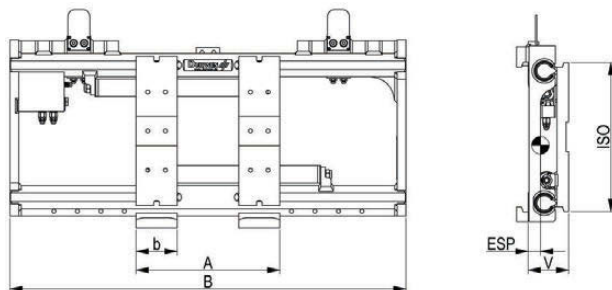


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 30	3000/500	3,0/500	III	1040 1100 1150 1200 1350	490-1120 490-1180 490-1230 490-1280 490-1430	125 (80-125)	138	55 57 60 60 60	145 153 160 166 175
RZV 35	3500/500	3,0/600- 3,5/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140 (100-140)	138	65	162 165 168 180
RZV 45	5000/600	3,5/600- 5,0/600		1150 1200 1250 1300 1350 1450 1550 1750* 2000**	490-1230 490-1280 490-1330 490-1380 490-1430 490-1530 490-1630 490-1830 490-2080	140 (100-150)	153	70	205 208 212 215 220 228 235 250 270


- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included

- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed


* minimum truck carriage width: 1450 mm
** minimum truck carriage width: 1750 mm



option: protection strip



fork lock

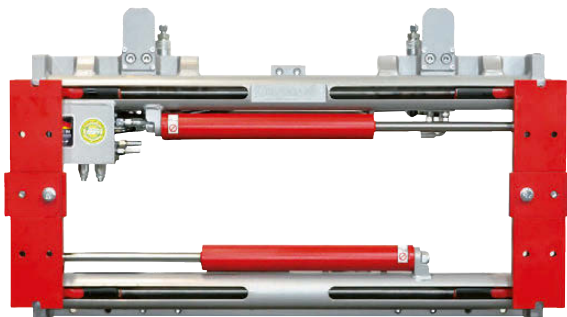

DURWEN 
Forklift Attachments

More than 75 years experience