


Sideshifting fork positioner



integral sideshift, no forks

The **sideshifting fork positioner RZV** uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.

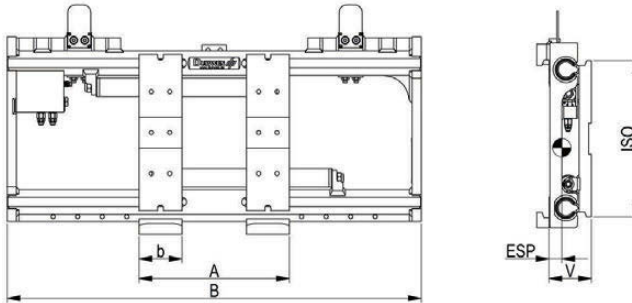


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg	
RZV 25	2500/500	1,5 - 2,5/500	II	980	490-1060	120 (80-125)	126	45	109	
				1000	490-1080			45	111	
				1040	490-1120			45	118	
				1100	490-1180			48	126	
				1150	490-1230			50	130	
				1200	490-1280			50	135	
				1350	490-1430			50	140	
RZV 28	2500/600	2,5/600		1040	490-1120			45	125	
				1150	490-1230			50	137	
				1350	490-1430			50	147	

- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO II) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

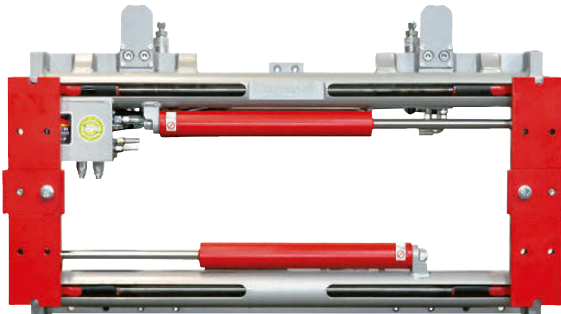

option: protection strip



fork lock