


Sideshifting fork positioner

RZV
ISO IV

integral sideshift, no forks

The sideshifting fork positioner RZV uses stable round bar guides for positioning of fork adaptors. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The integral sideshift is depending on fork position.


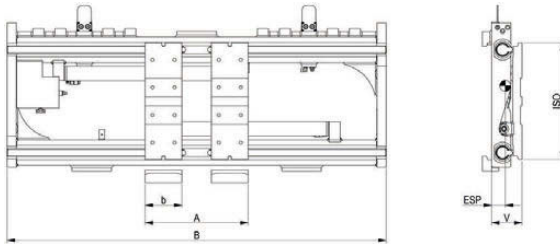


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 50	5000/600	5,0/600	IV	1250 1350 1450 1550	490-1330 490-1430 490-1530 490-1630	140 (120-150)	155	68	292 305 318 331
RZV 60	6000/600	6,0/600		1360 1460 1600 1660 1860	560-1460 560-1560 560-1700 560-1760 560-1960	150 (150)	165	72	430 450 480 490 530
RZV 70	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	165	74	460 535 545
RZV 80	8000/600	8,0/600		1460 1800 1860 2000 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2100 560-2160 560-2260 560-2360 560-2500	200 (150-200)	165	75	485 535 545 547 550 570 590 635
RZV 100	8000/900	8,0/900		2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500	200 (150-200)	190	70	700 725 750 810
RZV 110	8000/1100	8,0/1100		2060 2260 2400	560-2160 560-2360 560-2500	200 (200)	192	73	715 765 825


- 2 hydraulic functions required
- includes hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO IV) upon request

- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

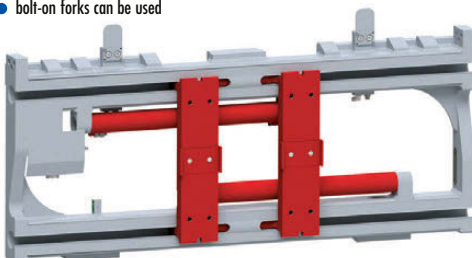

option: protection strip



fork lock

DURWEN
Forklift Attachments

More than 75 years experience