


Fork positioner

integrated, integral sideshift, no forks

The fork positioner RZV-I has a stable round guide in which the two mounting plates are moved. Sideshift by valve allows sideshift depending on the opening range of the fork mounts. Standard forks according to ISO 2328 are used but bolt-on forks from our company can be retrofitted at any time. Very good visibility is to be emphasized which makes safe working possible. Euro pallets can be picked up lengthwise. In addition, this device is characterised by its compact design whereby the forklift retains the greatest possible residual load capacity. The delivery of the integrated fork positioner includes brackets, stubshafts and chain anchors.


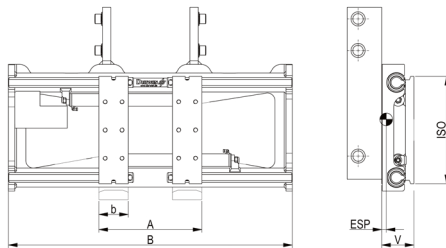


type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	V LLC mm	ESP COG mm	weight kg
RZV 50-I	5000/600	5,0/600	IV	1350 1450 1550	490-1430 490-1530 490-1630	140	163	65	300 315 330
RZV 60-I	6000/600	6,0/600		1460 1860	560-1560 560-1960	150	165	65	425 485
RZV 70-I	7000/600	6,5-7,0/600		1460 1860 2060	560-1560 560-1960 560-2160	150	165	65	435 495 530
RZV 80-I	8000/600	8,0/600		1460 1800 1860 2060 2160 2260 2400	560-1560 560-1900 560-1960 560-2160 560-2260 560-2360 560-2500	200	165	65	465 515 525 555 573 590 620
				2060 2160 2260 2400	560-2160 560-2260 560-2360 560-2500				715 738 760 810
				2060 2260 2400	560-2160 560-2360 560-2500				730 775 825
RZV 100-I	8000/900	8,0/900							
RZV 110-I	8000/1100	8,0/1100							

- 2 hydraulic functions required
- without hoses and couplings
- includes sideshift via valve, depending on opening range
- for hook-on forks ISO 2328
- bolt-on forks can be used

- forks not included
- please indicate fork width when ordering
- including brackets, chain anchor and stub shafts, without rollers
- detailed information including carriage drawings are required with the order as well as fork lift model and mast model details

- weight, COG and LLC do not include brackets
- LLC does not include forks
- protection strip/load backrest see page 240
- for forks up to 2400 mm, longer please ask
- clamping of goods is not allowed

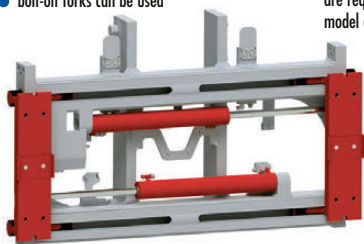

option: protection strip

DURWEN
Forklift Attachments

More than 75 years experience