



Sideshifting fork positioner

constant sideshift, no forks

The **sideshifting fork positioner RZV-S** uses stable round bar guides for positioning of forks. The simple design offers reliability and excellent operator visibility. Hook-on forks can be used. The constant sideshift operates at any fork position.

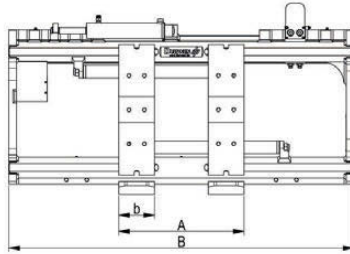



type	capacity kg LC mm	lift truck to LC mm	ISO	B mm	A mm	b (forks) mm	sideshift mm	V LLC mm	ESP COG mm	weight kg
RZV 30-S	3000/500	3,0/500	III	1040 1100 1150 1200 1350	490-1120 490-1180 490-1230 490-1280 490-1430	125 (80-125)	+/- 100	152	60	168 174 181 187 195
RZV 35-S	3500/500	3,0/600- 3,5/500		1100 1150 1200 1350	490-1180 490-1230 490-1280 490-1430	140 (100-140)		152	62	183 188 194 203
RZV 45-S	5000/600	3,5-5,0/600		1150 1200 1250 1300 1350 1450 1550 1750* 2000**	490-1230 490-1280 490-1330 490-1380 490-1430 490-1530 490-1630 490-1830 490-2080	140 (100-150)		168	70	235 239 244 247 250 258 265 280 315

- 2 hydraulic functions required
- includes hoses and couplings
- constant sideshift as standard
- for hook-on forks ISO 2328
- bolt-on forks can be used
- forks not included


- please indicate fork width when ordering
- load backrest/protection strip see page 240
- quick release hooks (ISO III) upon request
- for forks up to 2400 mm, longer please ask
- clamping of goods not allowed

* minimum truck carriage width: 1450 mm

** minimum truck carriage width: 1750 mm

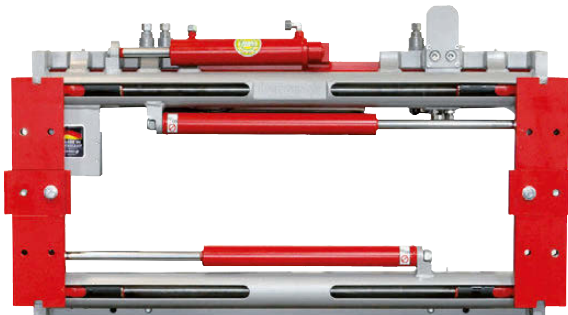

option: protection strip



fork lock